

LEGEND DISTRIBUTION



LEGEND DISTRIBUTION COSTA RICA

Tel: English +506-8718-8097 Espanol +506-8417-7117

www.legenddistributioncr.com/distribution-construction

Email: info@legenddistributioncr.com

Contents

FENCES, GATES AND MORE.....

Hot-dipped Galvanized Wire.....	02	358 High Security Fence.....	19	Steel Pipe.....	30
All Kinds of Wire.....	03	Silt Fence.....	20	Angle Steel.....	30
Barbed Wire.....	04	Metal Lintel-ul103.....	21	Nails.....	31
Concertina Razor Barbed Wire.....	05	Grape Post.....	22	Stainless Steel Wire Mesh.....	32
Field Fence.....	06	U Channel Sign Post.....	23	Crimped Wire Mesh.....	32
Chain Link Fence.....	07	Square Sign Post.....	23	Decorative Wire Mesh.....	33
Hexagonal Wire Mesh.....	08	T-Post.....	24	Steel Grating.....	34
Gabion Mesh.....	08	Y-Post.....	24	Angle Bead.....	34
Welded Gabions.....	09	L-Post.....	25	Perforated Metal Sheet.....	35
Welded Wire Mesh.....	10	U Fence Post.....	25	Expanded Metal Mesh.....	35
Euro Fence.....	11	Plant Support.....	26	Fiberglass Mesh.....	36
Welded Mesh Panel.....	12-13	Bird Spike.....	26	Shade Net.....	37
Wire Mesh Fence.....	14-15	Electric Fence Post (Pigtail Style).....	27	Safety Netting.....	37
Farm Gate.....	16	Electric Fence Post.....	27	Window Screening.....	38
Garden Fence.....	17	Anchors.....	28	Machinery.....	39
Euro Fence.....	18	Fence Accessories.....	29		

HOT-DIPPED GALVANIZED WIRE

We produce quality hot-dipped galvanized iron wire with careful control of every process from Steel Rod Coil - Wire Drawing - Annealing - Rust Removing - Acid Washing - Zinc Plating - Wire Coiling.

Wire Diameter: from 3.0mm to 8.0mm; **Zinc Coating:** 10g/m² to 260g/m²; **Tensile Strength:** 350N/mm²-1600N/mm²; **Packing:** 500kg/coil, 800kg/coil or 1000kg/coil.

Application: widely used in construction, handicrafts, woven wire mesh, express way fencing mesh, packaging of products and other daily uses.



ALL KINDS OF WIRE

Stainless Steel Wire:

Material Type: 302,304,304L,316,316L and 430

Wire Diameter: from 0.08mm to 4.0mm

Packing: 3kg-5kg per spool

Application: used in weaving mesh,wire rope,purified ball,filtration and weaving tube,etc

PVC Wire:



Material Type: PVC or PE

Wire Diameter: from 0.5mm to 4.5mm

Packing: 25kg per coil

Application: used in binding,weaving and construction type etc.

We are also capable of galvanized wire, black annealed wire, cut wire, and button wire. If you are interested, please send the specifications to us for reference. All the dimensions and packing can be according to customer's special requirements.

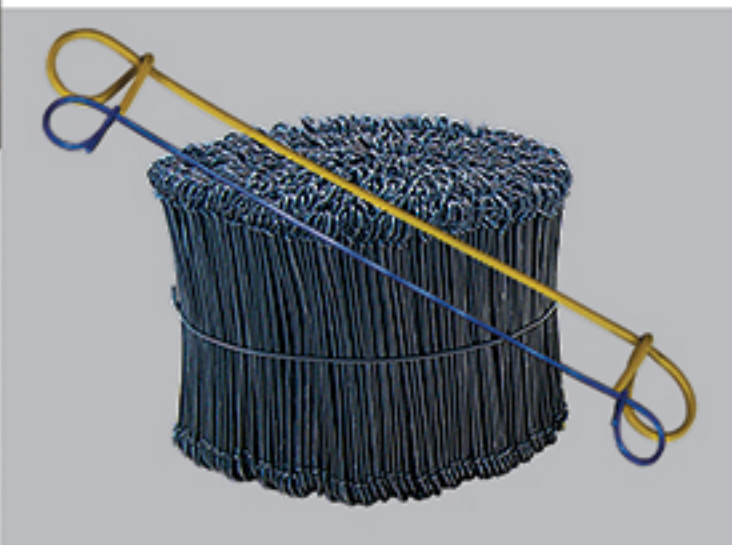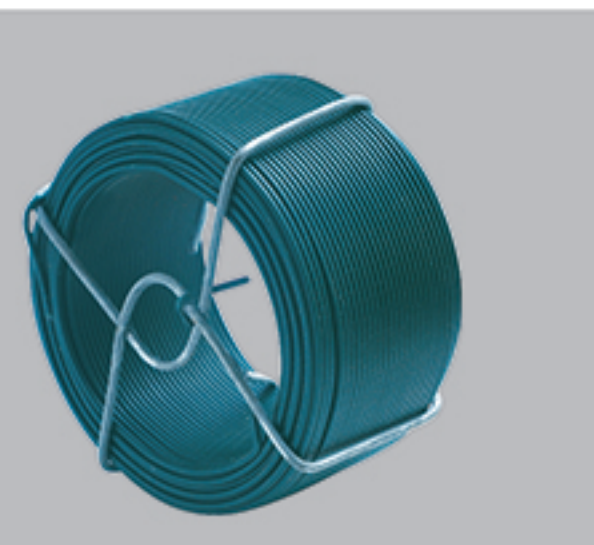

INDUSTRIAL METAL

BARBED WIRE

Materials: high quality low carbon steel wire, PVC wire with the color of blue, green and yellow etc.

Weaving: twisting and weaving

Features and Application: this barbed wire is reliable steady and beautiful. Mostly used in protecting grass boundary, railway and high ways and etc.

Type	Wire Gauge		Barb Distance (cm)	Barb Length(cm)	Coil Length
Electric Galvanized , Hot-dip zinc plating barbed wire	BWG 12 ~ BWG 18		7.5~15	1.5~3	110m, 220m, 400m
PVC coated barbed wire;PE barbed wire	before PVC coating	after PVC coating	7.5~15	1.5~3	
	BWG11~BWG20	BWG8~BWG17			




CONCERTINA RAZOR BARBED WIRE

We are capable of produce traditional razor wire, razor wire in straight lines, razor wire in concertina single coils or crossed coils. A variety of blade type and sizes are for the choice of our customers. Standard materials for razor wire are either galvanized or stainless steel.

All the units by mm.

Reference Number	Blade Style	Thickness	Wire Dia	Barb Length	Barb Width	Barb spacing
BTO-10		0.45±0.05	2.5±0.1	10±1	13±1	26±1
BTO-12		0.45±0.05	2.5±0.1	12±1	15±1	26±1
BTO-18		0.45±0.05	2.5±0.1	18±1	15±1	33±1
BTO-22		0.45±0.05	2.5±0.1	22±1	15±1	34±1
BTO-28		0.45±0.05	2.5	28	15	45±1
BTO-30		0.45±0.05	2.5	30	18	45±1
CBT-60		0.45±0.05	2.5±0.1	60±2	32±1	100±2
CBT-65		0.45±0.05	2.5±0.1	65±2	32±1	100±2

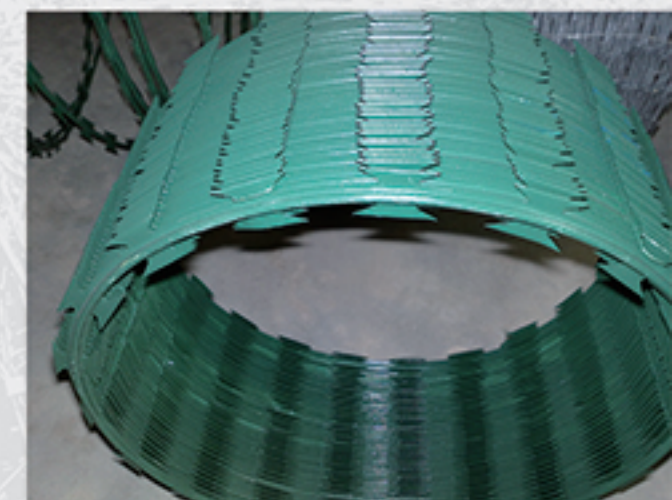



FIELD FENCE

Material: high strength galvanized wire

Characteristics: strong tensile resistance, beautiful form, good anti-corrosive

Application: using grassland, field foster, project of zoology defend

All specifications can be according to customer's requirements.

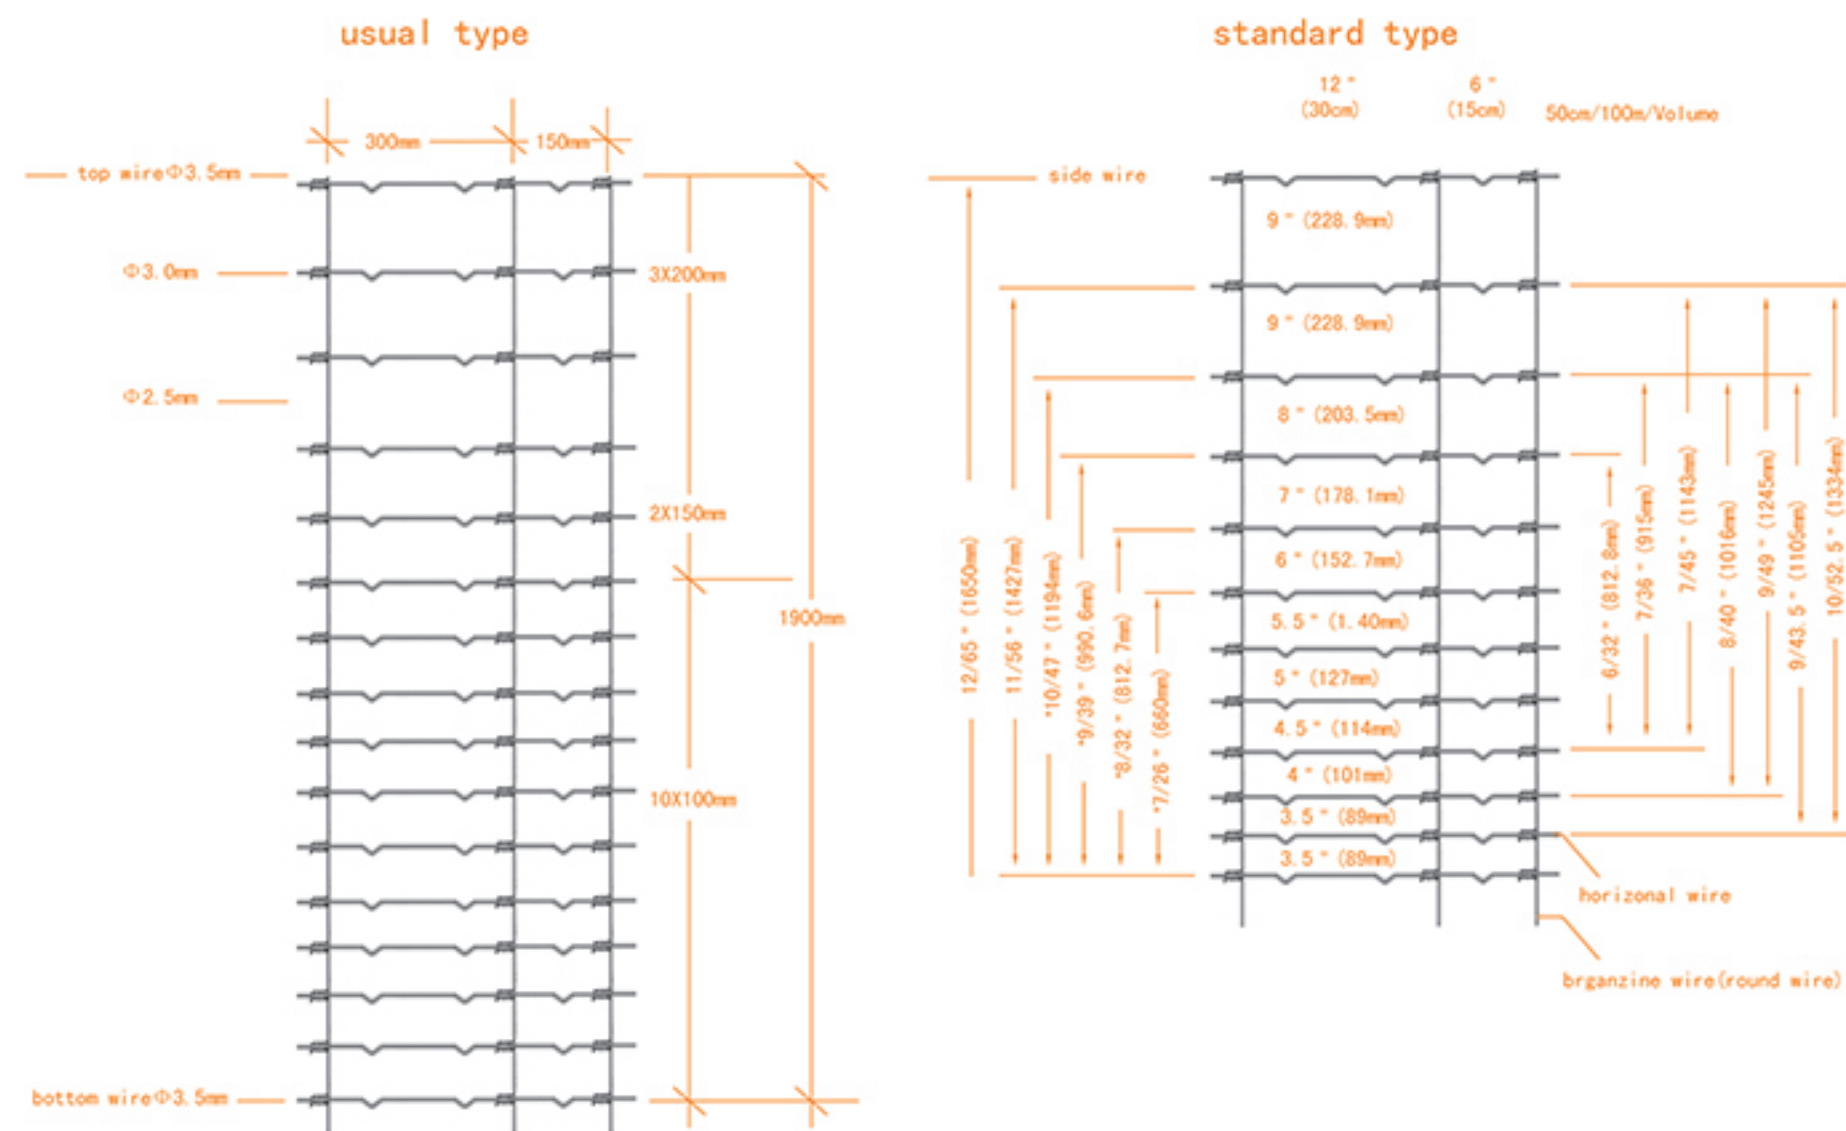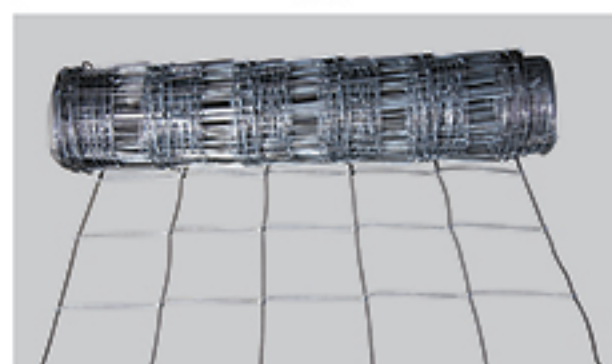

CHAIN LINK FENCE

It also named "Diamond Wire Mesh"

Sizes of Diamond Wire Mesh								
Opening	1"	1.5"	2"	2.25"	2.4"	2.5"	3"	4"
	25mm	40mm	50mm	55mm	60mm	65mm	76mm	100mm
Wire Dia.	BWG18~~BWG8(1.20mm~4.00mm)							
Length of the Roll	1.0m~~50m							
Width of the Roll	0.5m~~4.5m							
Use	It is widely used as speedway,protection,safe guard on machinery, building wall, poultry fence,playing-field,greening fence, waterways and residence safeguard etc.							
	PVC wire or Galvanized wire, materials and specifications can be made according to customers specific requirements.							



HEXAGONAL WIRE MESH


Wire: 0.5-2.0mm; **Mesh:** 3/8"-2" ; **Size:** 2'-7'

Materials: hot-dipped galvanized wire, electro-galvanized wire or PVC wire.

Weaving: Straight twist, reverse twist, double twist.

Color: PVC coated with Green, White or other colors.

General Use: Hexagonal wire mesh with its good corrosion resistance and oxidation resistance, serves well as strengthen, protection and temperature keeping materials in the form of mesh container, stone cage, isolation wall, boiler cover or poultry fence in construction, petroleum, chemical, breeding, garden and food processing industries.

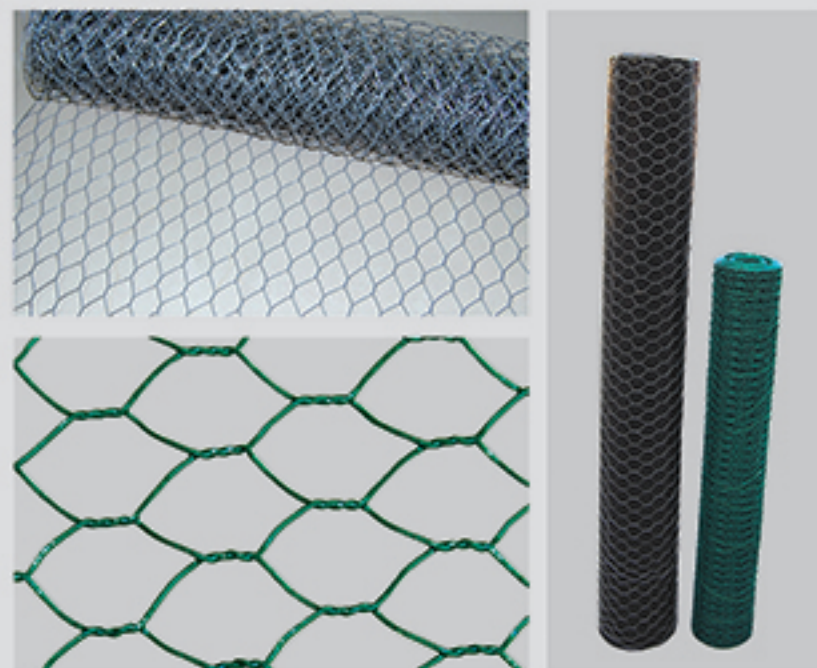


GABION MESH

Size of Gabion			
Mesh Wire Gl.Dia.	Selvedge Wire Gl.Dia.	Standard Mesh	Dimensions (L x W x H)
2.0mm, 2.2mm, 2.7mm	2.7mm, 3.0mm, 3.4mm	60 x 80mm, 80 x 100mm, 100 x 120mm ...	1m x 1m x 1m 2m x 1m x 1m 3m x 1m x 1m ...



WELDED GABIONS

Wire	4mm
Mesh	50x50mm; 50x100mm; 100x100mm
Size	length: 1m or 2m
Width	0.5m, 1m, 2m
Height	0.3m, 0.5m, 1m, 2m
Surface treatment	hot dipped galvanized


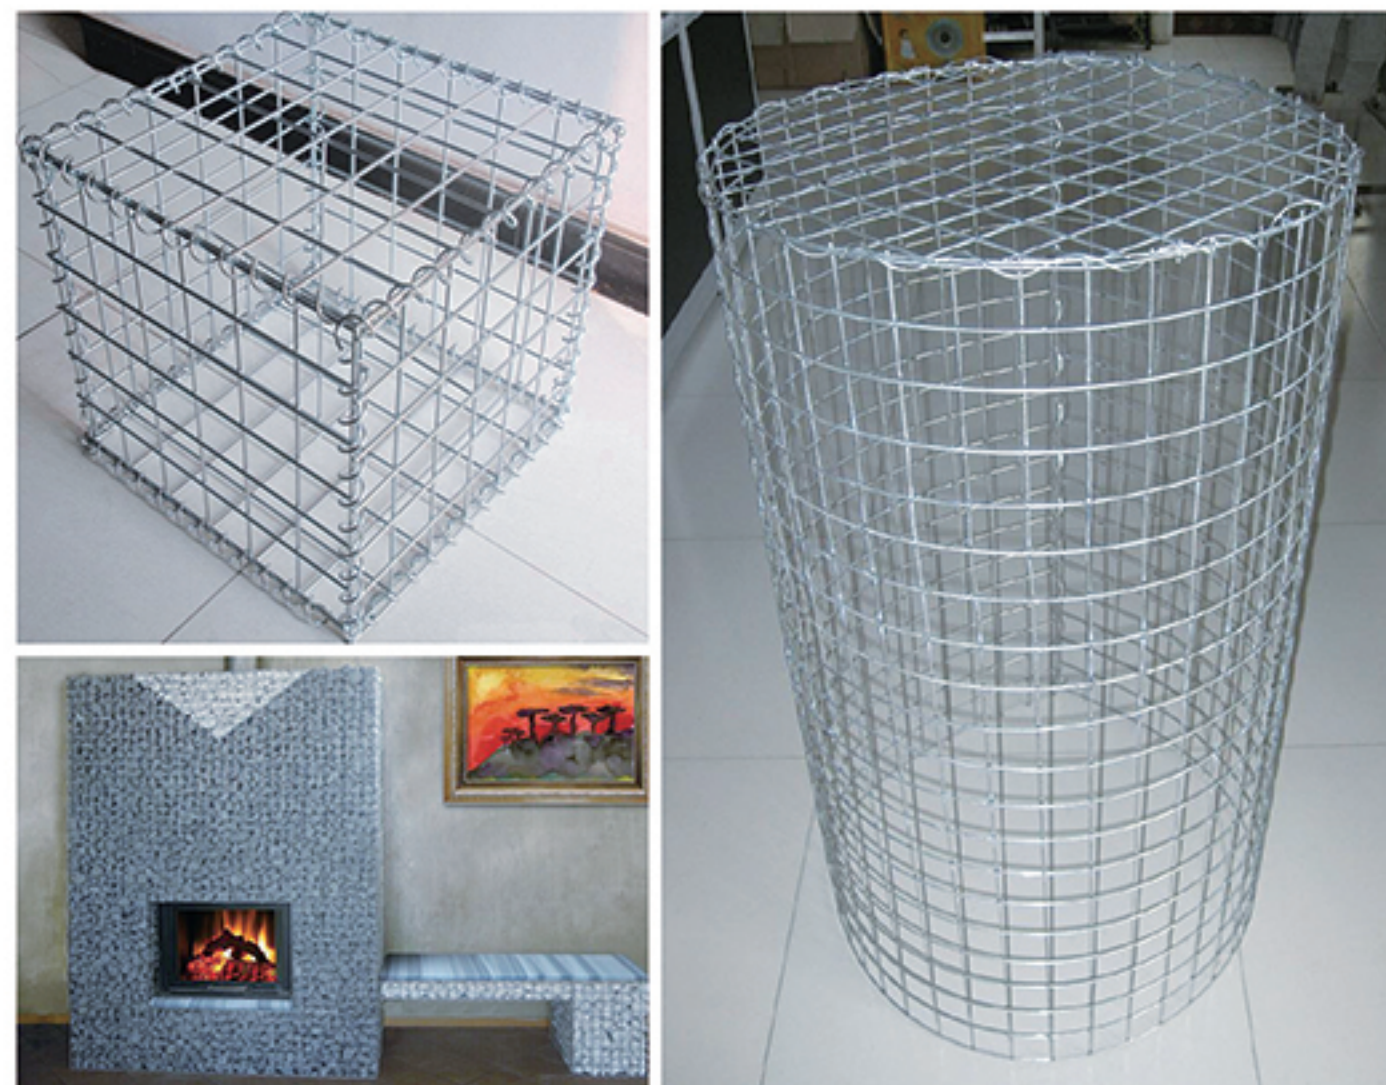


ANTI-BLAST WALLS



WELDED WIRE MESH

Welded wire mesh is extensively used in industry and agriculture building, transportation and mining for all such purposes as poultry house, egg baskets, runway enclosures, draining rack, fruit drying screen and fence.

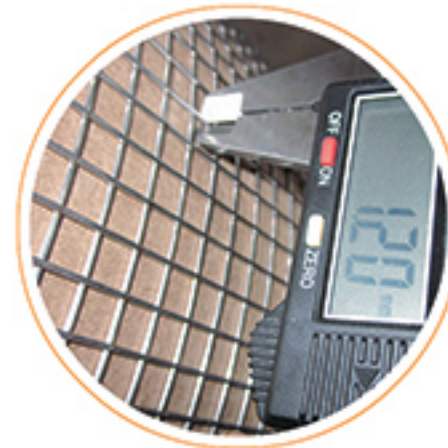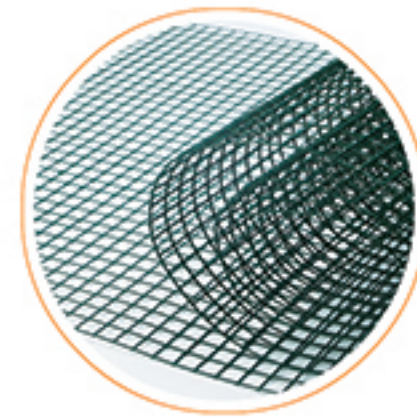

Mesh		BWG	Assortments available
Inch	MM		
1/4" x 1/4"	6.4mm x 6.4mm	22, 23, 24	Hot-dipped galvanized after welding; Hot-dipped galvanized before welding; Electro galvanized after welding; Electro galvanized before welding; PVC-coated; Stainless steel.
3/8" x 3/8"	9.5mm x 9.5mm	19, 20, 21, 22	
1/2" x 1/2"	12.7mm x 12.7mm	16, 17, 18, 19, 20, 21, 22, 23	
5/8" x 5/8"	15.9mm x 15.9mm	18, 19, 20, 21	
3/4" x 3/4"	19.1mm x 19.1mm	16, 17, 18, 19, 20, 21	
1" x 1/2"	25.4mm x 12.7mm	16, 17, 18, 19, 20, 21	
1-1/2" x 1-1/2"	38mm x 38mm	14, 15, 16, 17, 18, 19	
1" x 2"	25.4mm x 50.8mm	14, 15, 16	
2" x 2"	50.8mm x 50.8mm	22, 23, 24	
1/4" x 1/4"	6.4mm x 6.4mm	12, 13, 14, 15, 16	

EURO FENCE

Materials: low carbon steel wire


Specification: 1. net width: 0.5m-2.5m. 2. Before coating- (wire diameter) after coated :1.0-3.0 (mm). 3. hole size: 50x50 50x100(mm).

Advantage: Beautiful, durable, easy to transport and install, with good precision filtering, load strength.

Uses: used in highway, railway, airport, residential community, seaport, feeding and husbandry protection.

Manufacturing: steel wire coated after welding can also be individually plated, hot dipped and PVC coated.

Methodology: high quality iron wire welded to PVC or PE, PP powder coating surface treatment after curing, has a strong adhesion, good corrosion resistance, bright color, etc.

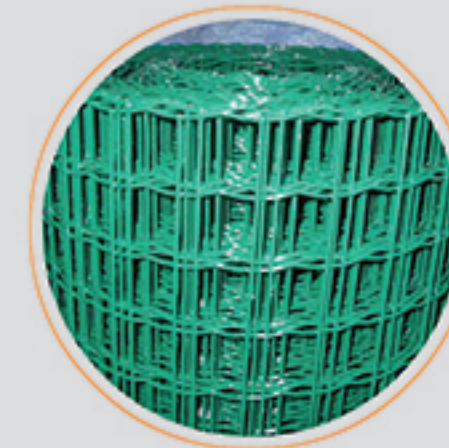

WELDED MESH PANEL



Welded mesh panel can be made of superior quality welded mesh, electro galvanized, hot-dipped galvanized or plastic coated. It is also supplied in plain steel without galvanizing to save cost. Please see the specification as follows:

Item	Material	Wire Dia.	Mesh	Sheet			Surface Treatment	Use	Packing
				Width	Length	Folds			
Flat Welded Mesh Panel	Low carbon steel wire, galvanized wire	2.0mm~~5.0mm	50x50mm 50x50mm 50x100mm	1.2m	2.4m		Hot-dipped galvanized or electro galvanized, powder coated, PVC coated	Mainly used in building, transport, breeding and machinery etc.	Pallet
Double Wire Welded Mesh Panel		8/6/8mm 7/5/7mm 6/5/6mm	50x200mm	1.23m 1.53m 1.83m 2.03m	2.5m				
Welded Mesh Panel		3mm~~4.5mm	50x200mm	0.83m 1.23m 1.53m 1.83m 2.03m	2.5m	2V 2V 3V 3V 4V			



Wire Mesh Panel					Post	Surface Treatment	Color	Packing	Remark
Wire Dia.	Mesh	Height	Length	Folds	Anti-steel post 70x100mm or square post 50x50mm/60x60mm				
3.5mm,or 4mm,or 4.5mm	50x200mm	1.03m	2.0m or 2.5m	2V	1.33m/pcs	Hot dipped galvanized or electro galvanized panels, plastic coated ,PVC coated	Green, white, black	Pallet	Custom sizes can be acceptable
		1.23m		2V	1.53m/pcs				
		1.53m		3V	1.83m/pcs				
		1.83m		3V	2.13m/pcs				
		2.03m		4V	2.33m/pcs				



WIRE MESH FENCE

Single Gate

Fence Height	Gate Width	Post	Remark
830mm	1000mm	Use with the multipost or Square post	Custom sizes can be acceptable
1230mm	1000mm		
1530mm	1000mm		
2030mm	1000mm		

Double Gate

Fence Height	Gate Width	Post	Remark
830mm	2x1500mm	Use with the multipost or Square post	Custom sizes can be acceptable
1230mm	2x1500mm		
1530mm	2x1500mm		
1830mm	2x1500mm		




GARDEN GATE

Wire	4.0mm
Mesh	50 x 50mm
Frame	60 x 1.5mm
Size	1m wide x 1m height or others



With the increasing emphasis on safety in the construction industry, mobile fence has been widely used around the construction sites to keep the workers or public away. This fence can also be used as temporary fence at fairs, public rallies.

Mobile fence is made with hot dip galvanized tube and wires in different mesh sizes, the fence has a 30mm barb fence at top for anticlimbing.

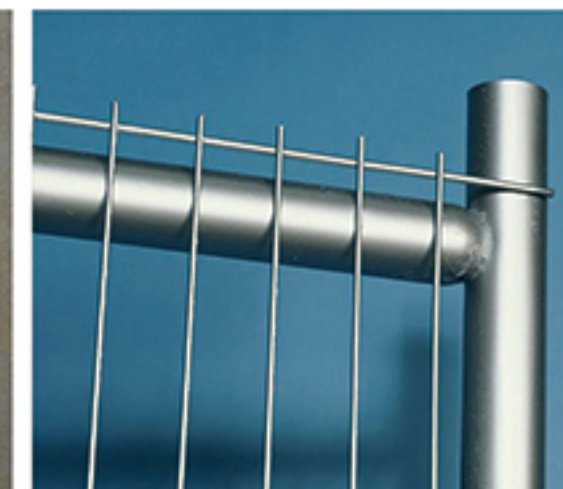

Size: 3450x2000mm; 2250x2000mm
 Vertical Tube: \varnothing 38x1.5mm
 Horizontal Tube: \varnothing 25x1.5mm
 Wire Dia.: \varnothing 3mm
 Mesh Size: 100x200mm, 100x250mm



FARM GATE

The farm gates are made with round tube or mesh filling inside, finished with hot-dip galvanized after welding, pre-hot-dip galvanized or powder coated in different colours. More designs are available or it can be produced according to the drawing.



GARDEN FENCE

We can produce the garden fence based on the follow pictures, also custom sizes can be acceptable.



JS-001



JS-002



JS-003



JS-004



JS-005



JS-006



JS-007




JS-008



JS-009

EURO FENCE

Palisade fencing is one of fencing series. It is used in Europe and Africa at first. Now palisade fence is widely used at home and abroad. Palisade fencing instead of the brick wall or heavy fence makes your life environment clear. It is widely used because of people's environment pursuit, publicity of personal cleanliness and the pursuit of foreign style. Palisade fencing with beautiful structure and various styles are popular and widely used.

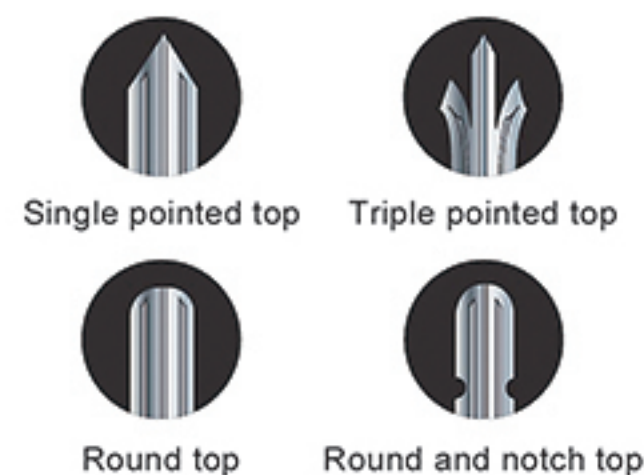

358 HIGH SECURITY FENCE

Product Description: The wire fence is composed with quadrate post and high strength welded wire fence: has a strong erosion resistance and anti-ultraviolet: connected by screw flat bar, the installation is very easy and convenient.

High Anti-Corrosion: Using high quality iron rod as raw material, the welded panel, after galvanization, powders primer, and powders top coating, it can resist the corrosive and ultraviolet radiation very strongly.

Application: Power station, Commonality construction, Jail, Airport Military base, Country border and other high security area and place. Extra choose the angle steel, barbed wire or razor wire fence to make more security.



SILT FENCE

Silt Fence is the ideal barrier for sediment control around construction sites or wherever there is bare or disturbed earth. The woven geotextile used on wire backed silt fence is designed to filter out sediment from construction site run-off, yet allow clean water to pass through.

Silt fence is a temporary sediment barrier of entrenched permeable geotextile fabric designed to intercept and slow the flow of sediment-laden sheet flow runoff from small areas of disturbed soil. The purpose of this practice is to reduce slope length of the disturbed area and to intercept and retain transported sediment from disturbed areas.

Product Applications

Silt control at construction sites

Required in some jurisdictions

Mount on t-post around perimeter


Easily attached to existing wire site fences

A more robust silt fence

Can hold more silt before it needs to be cleaned

Can double as a safety fence around a job site



teel t-post are available

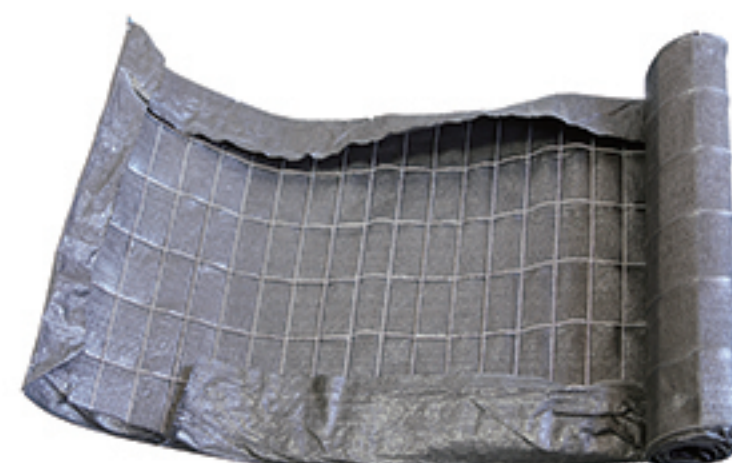

Welded wire mesh Type	Electro galv. (E.G) welded wire mesh and Hot dipped galv.welded wire mesh (H.D.G)
Mesh Size	2"x4" or 4"x4" or as required
Wire Mesh Width	24",36",48",etc (2ft,3ft,4ft.....)
Wire Mesh Length	100ft,150ft or as required
Fabric Material	100% PP material
Fabric Weight	70gsm,80gsm,90gsm,100gsm, etc.
Fabric Width	36",48",60",etc (3ft,4ft,5ft.....)
Fabric Length	100ft,150ft or as required



METAL LINTEL-UL103

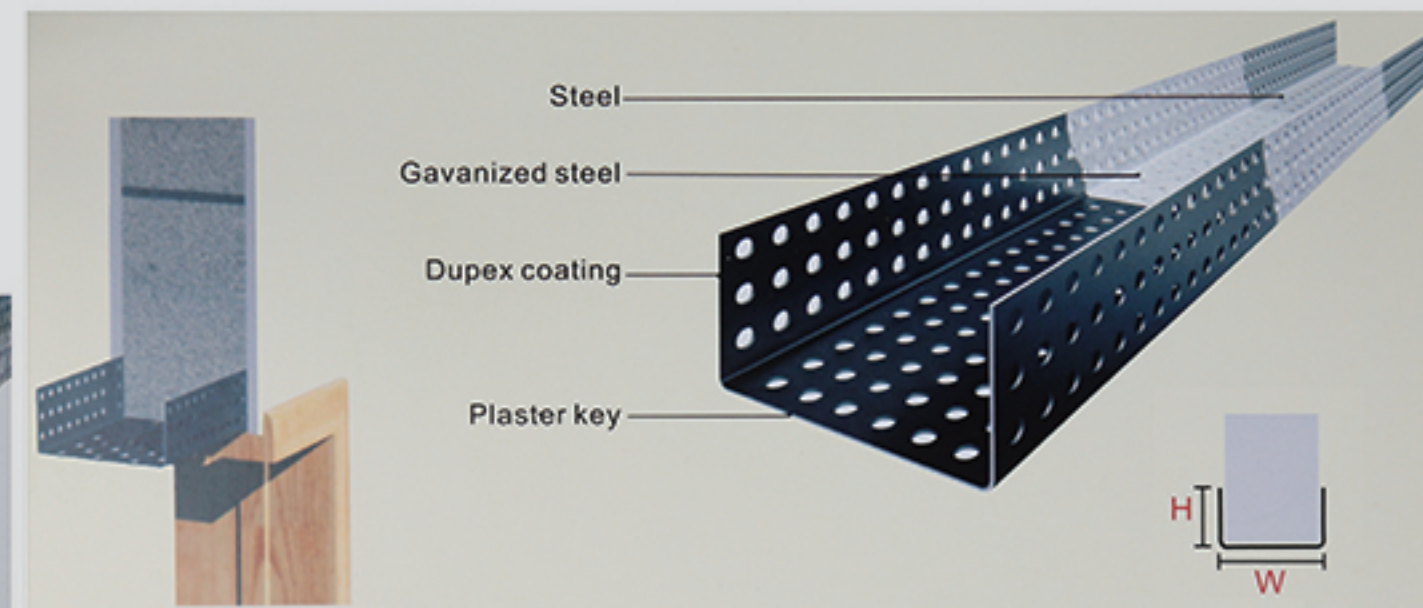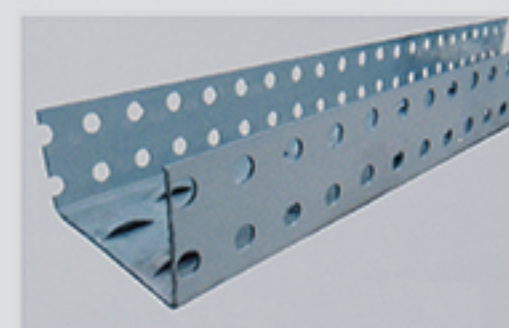


100m Wide Solid Walls

Note:Width dimensions are inside of channel dimensions

Lintel dimension (mm)		Lintel type/ code	Gave code	Sheet thickness (mm)	Weiggth per metre (kg)	Safe working load uniformly distributed(tonnes) Lengths available(mm)in increments of 100(mm)						
W	H					900-1200	1300-1500	1600-1800	1900-2100	2200-2400	2500-2700	2800-3000
103	50	UI100	A	2.0	3.0	0.55	0.42	0.31	-	-	-	-
			B	2.5	3.7	0.80	0.58	0.38	0.24	0.18	-	-
			C	3.1	4.7	1.12	0.66	0.44	0.31	0.23	0.16	0.13
	75	UI103	C	3.1	5.9	1.63	1.25	1.00	0.86	0.64	0.47	0.38
153	50	UI150	A	2.0	3.7	0.48	0.37	0.27	-	-	-	-
			B	2.5	4.7	0.76	0.58	0.41	0.27	0.19	-	-
			C	3.1	5.9	1.22	0.79	0.52	0.37	0.28	0.19	0.14
			C	3.1	7.1	1.63	1.25	1.00	0.86	0.64	0.47	0.38
203	50	UI152	A	2.0	4.4	0.62	0.48	0.35	-	-	-	-
			B	2.5	5.6	0.77	0.59	0.41	0.29	0.21	-	-
			C	3.1	7.1	1.05	0.80	0.53	0.38	0.28	0.19	0.14
	75	UI200	C	3.1	8.5	1.63	1.25	1.00	0.86	0.64	0.47	0.37
253	50	UL250	A	2.0	5.4	0.62	0.48	0.35	-	-	-	-
			B	2.5	6.7	0.77	0.59	0.41	0.29	0.21	-	-
			C	3.1	8.6	1.05	0.80	0.53	0.38	0.28	0.28	0.14

GRAPE POST

Size: 54 x 30mm or 50 x 34mm
 Length: according to customers' requirement.
 Zinc coating: 150gr/m², 275gr/m²
 Thickness: 1.2mm, 1.5mm, 2.0mm, 2.5mm

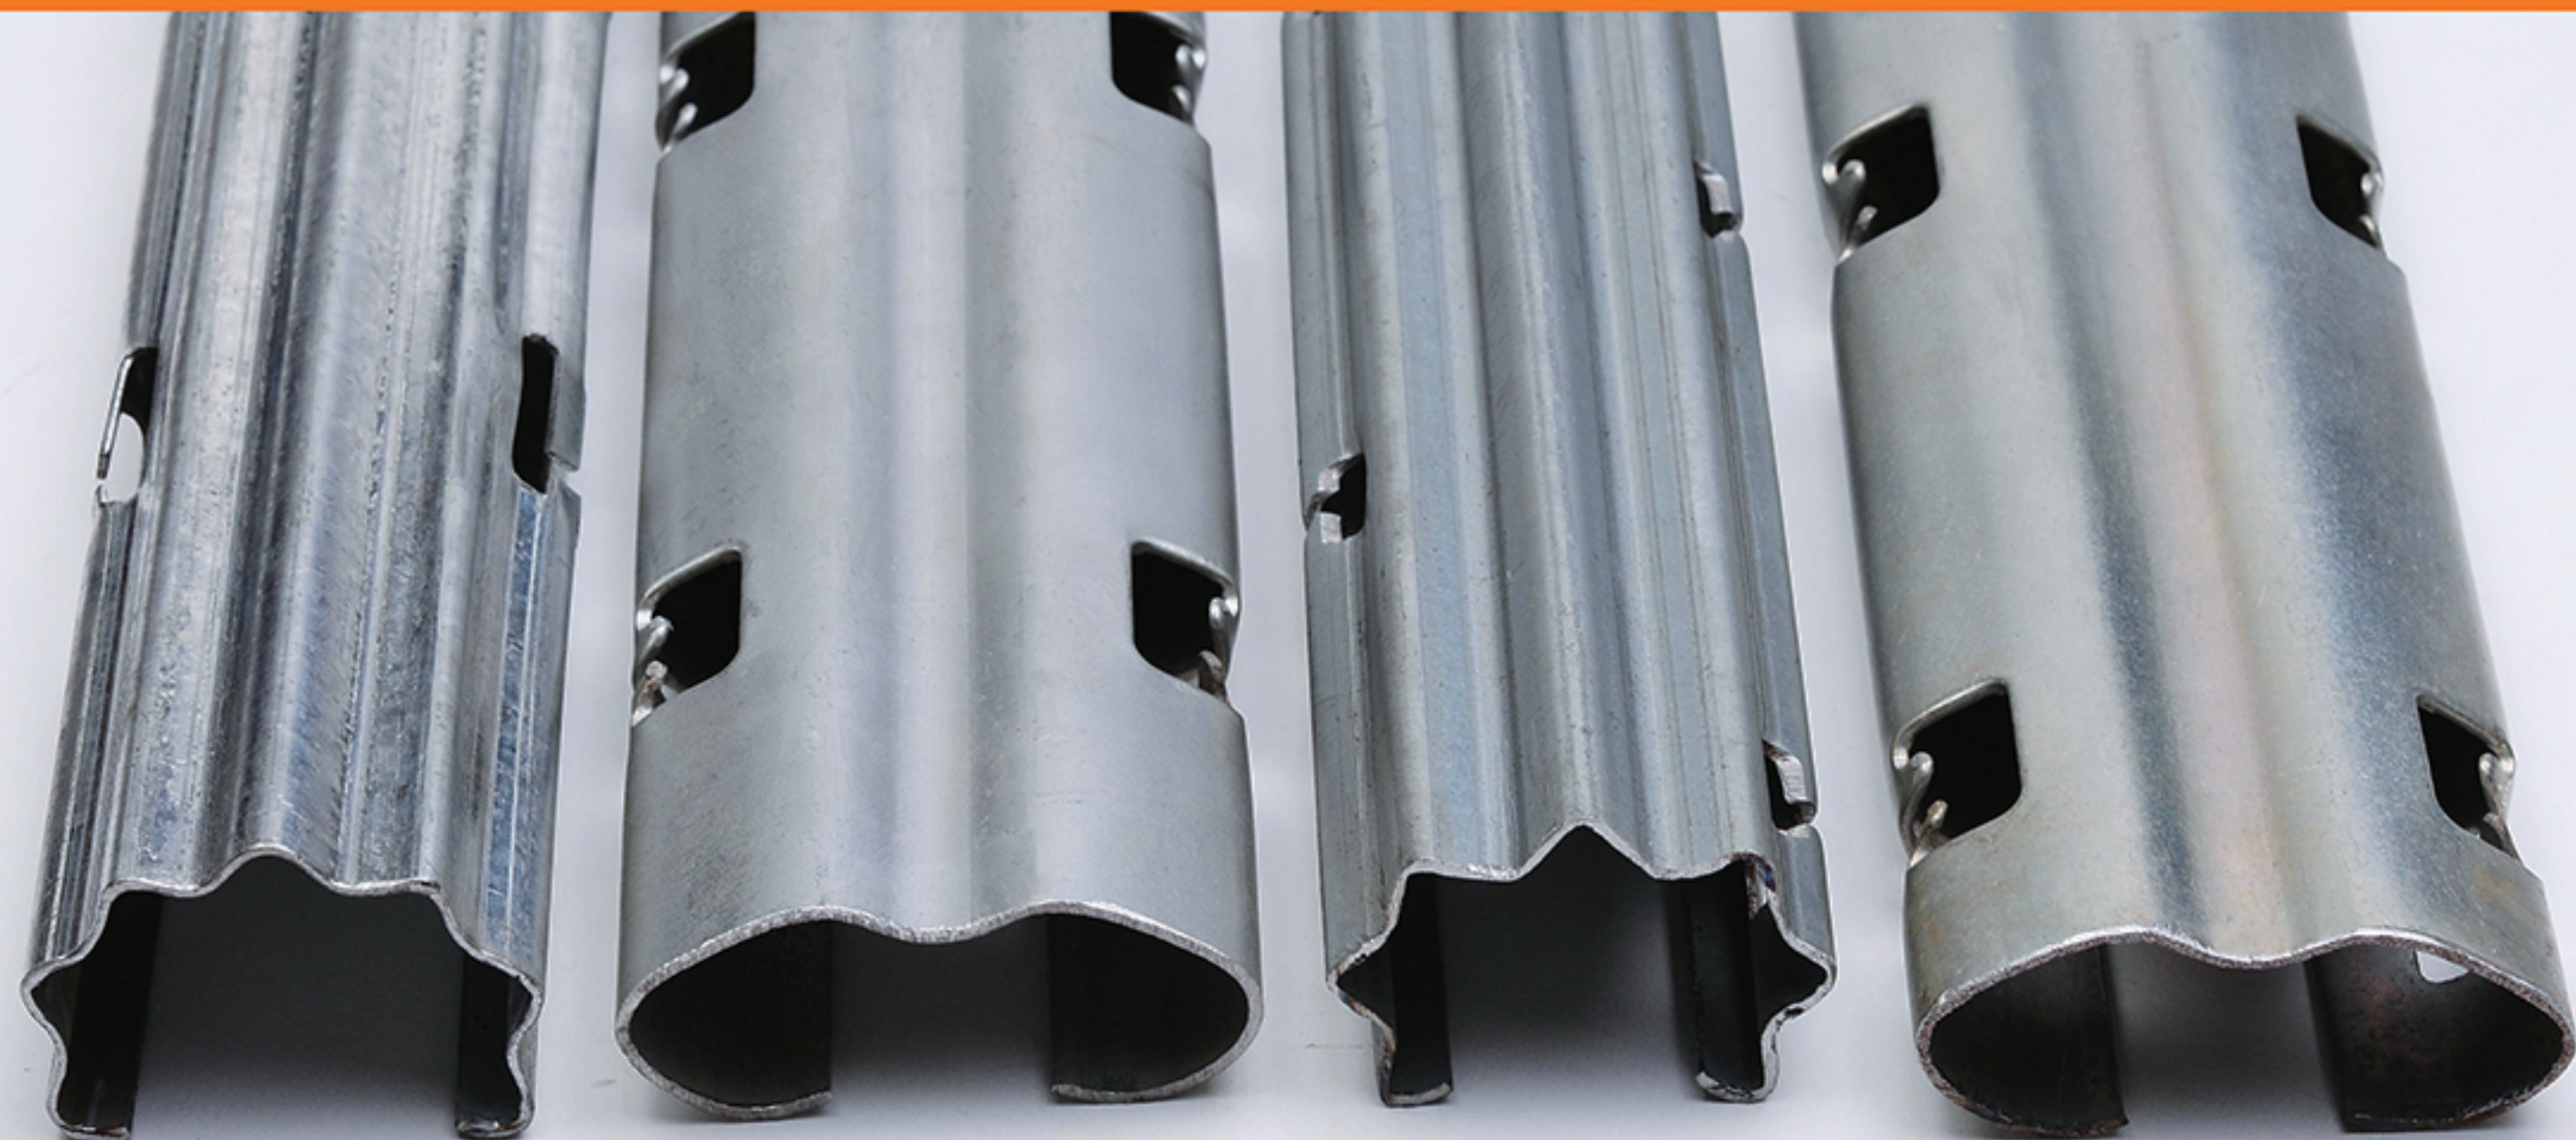

U CHANNEL SIGN POST


U Channel sign post is made of steel sheet. It is used for hanging security signs, such as Parking, road side, address sign, advertisement post. Some warning marks hang on it to remind of people. Sometimes it's used for plant support, such as vineyard, plantation and orchard. All the sign posts are made with high strength steel, have tapered ends. The holes are along all the post, you can adjust the signs at any height.

Specification:

1. Material: Steel sheet ; 2. Hole size: 3/8", 7/16" ; 3. Hole space: 1" ; 4. Surface Treatment: Hot Dipped Galvanized , Powder Coated ; 5. Length: 6ft/pc, 8ft/pc, 10 ft/pc ; 6.Type:1.12 lb/ft, 2 lb/ft
 Other size is accepted.

Features:

1. All posts are made with high strength steel ; 2. Yield Strength: 80000 PSI ; 3. Tensile Strength: 95000 PSI
 4. Posts have tapered ends ; 5. Heavy zinc coating, anti-rust, long life

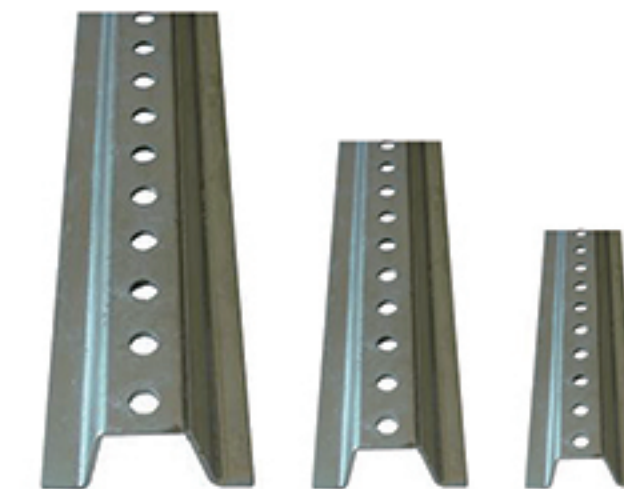


SQUARE SIGN POST

Square tube comes in: 1", 1 3/4", 2", 2 1/4", 2 1/2"
 Available in 3ft, 8ft, 10ft, 12ft, 14ft and any length according to your demand
 Available in 12 and 14 gauge
 ASTM designation A653
 7/16" Holes on 1" Centers
 Hot dipped galvanized zinc coating conforming to coating designation G-90
 Powder coated sign posts are available
 Perforated square sign post


Material standard	ASTM A1011, Grade 50
Yield strength	60,000 psi minimum--80,000Psi
Surface treatment	Hot-dipped galvanized or powder coated
Holes	7/16" holes on 1"centers on all four sides down the entire length of the post
Cross section	1 1/2", 1 3/4", 2", 2 1/4", 2 1/2"
Thickness	12 gauge or 14 gauge
Length	All kinds of length according to your demand
Feature	provide superior resistance to wind and other forces

Packaging: Standard seaworthy packing, bundle, container, etc.

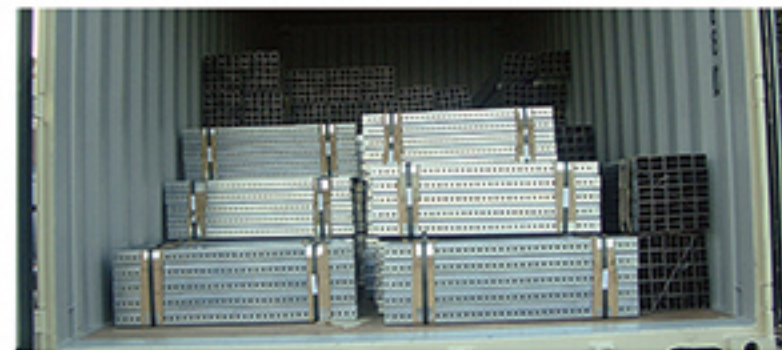

T-POST

Specification	Length(feet)	Types
0.95lb/ft	5' 6' 7'.....	Galvanized or plastic coated
1.25lb/ft	5' 6' 7'.....	
1.33lb/ft	5' 6' 7'.....	

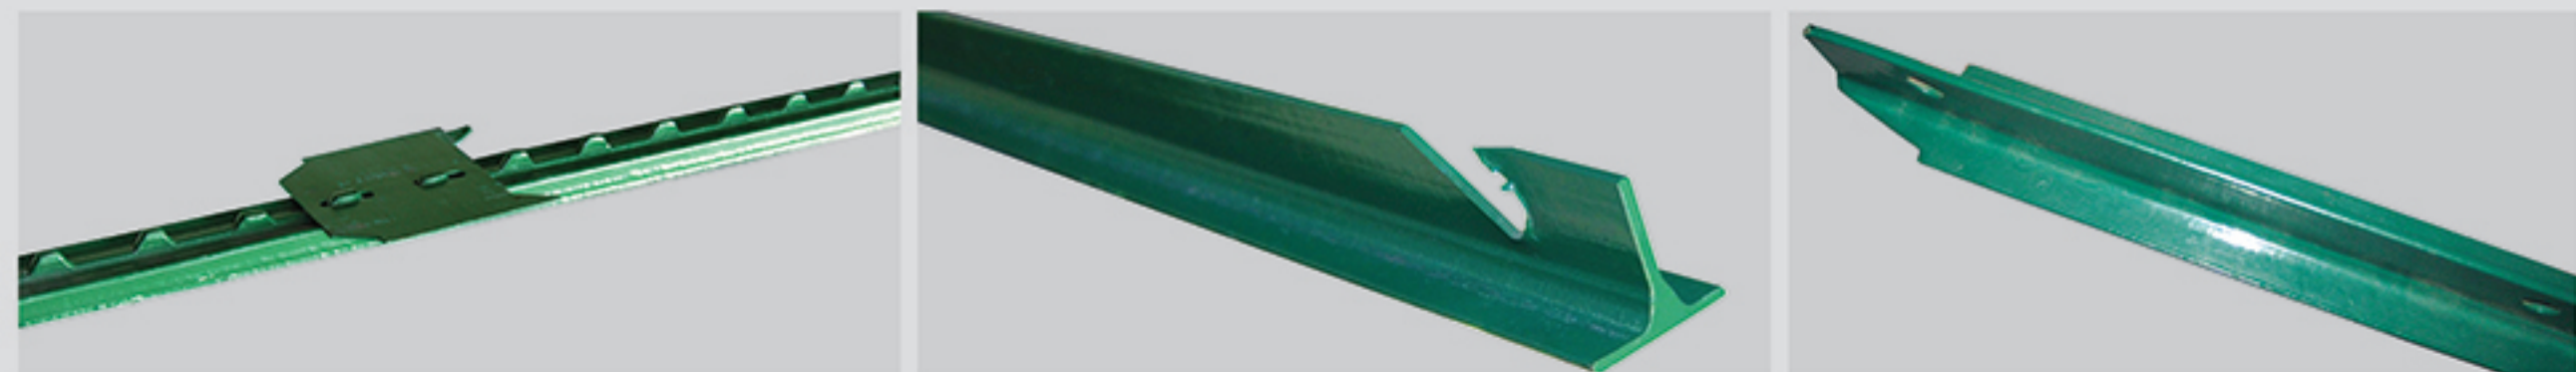

Y-POST


Specification	Length(m)	Types
1.58kg/m	1.65m, 1.8m, 2.4m	Galvanized or plastic coated
1.86kg/m	1.65m, 1.8m, 2.4m	
2.04kg/m	1.65m, 1.8m, 2.4m	



L-POST

Model (MM)	Wall thickness (MM)	Length (CM)					
L25 x 25	2.5 - 3.0	100	125	150	175	200	225

Used wood / plywood, 10pcs/pallt, or according to customers' requirement.

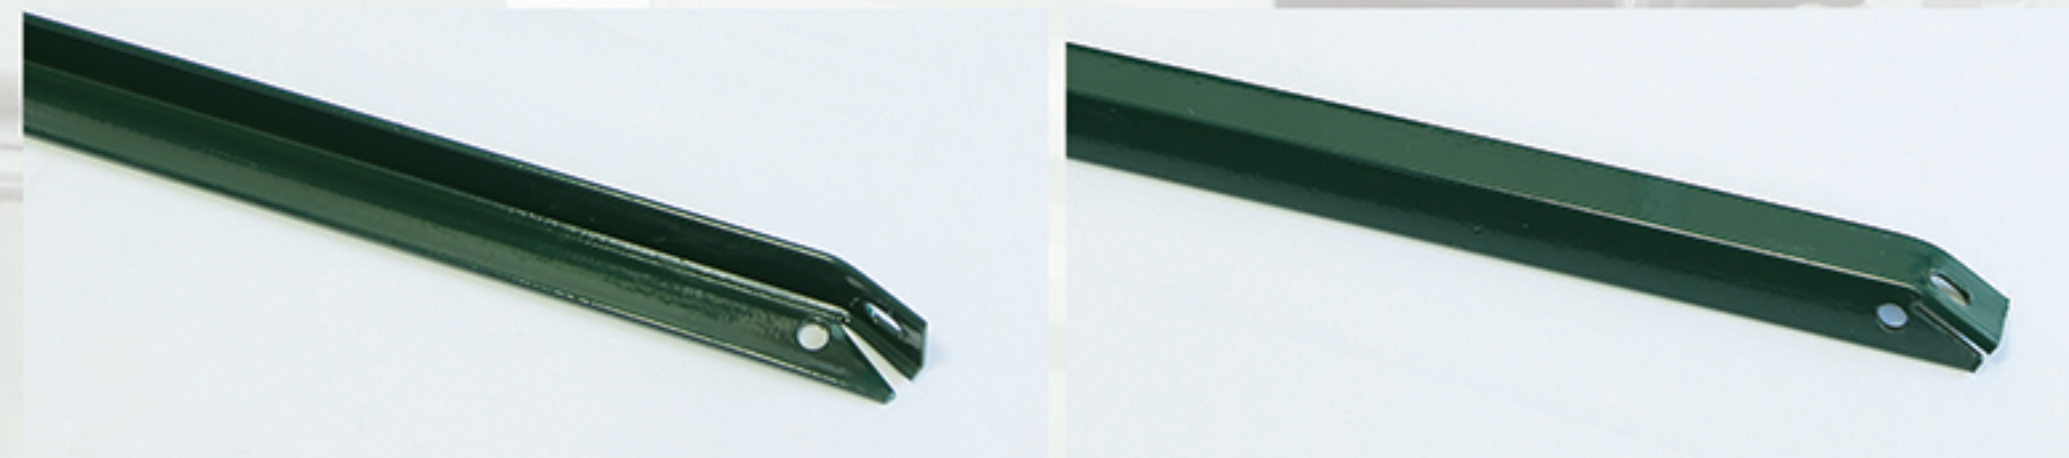


U FENCE POST

Thickness	2.0mm, 2.2mm, 2.5mm						
	Light duty	3 feet	4 feet	5 feet	6 feet		
Heavy duty	5 feet	6 feet	7 feet	8 feet	9 feet	10 feet	
Finish	Painted & zinc plated						
Packing	5 pcs/bundle, 200pcs/pallet						

U post is durable, green poly coated steel. Posts can be bolted together for extra support. Special channel construction for maximum strength
 Light duty 10pcs/bundle, 800pcs/pallet ; Heavey duty 10pcs/bundle, 500pcs/pallet
 MAIN MARKET : USA



PLANT SUPPORT

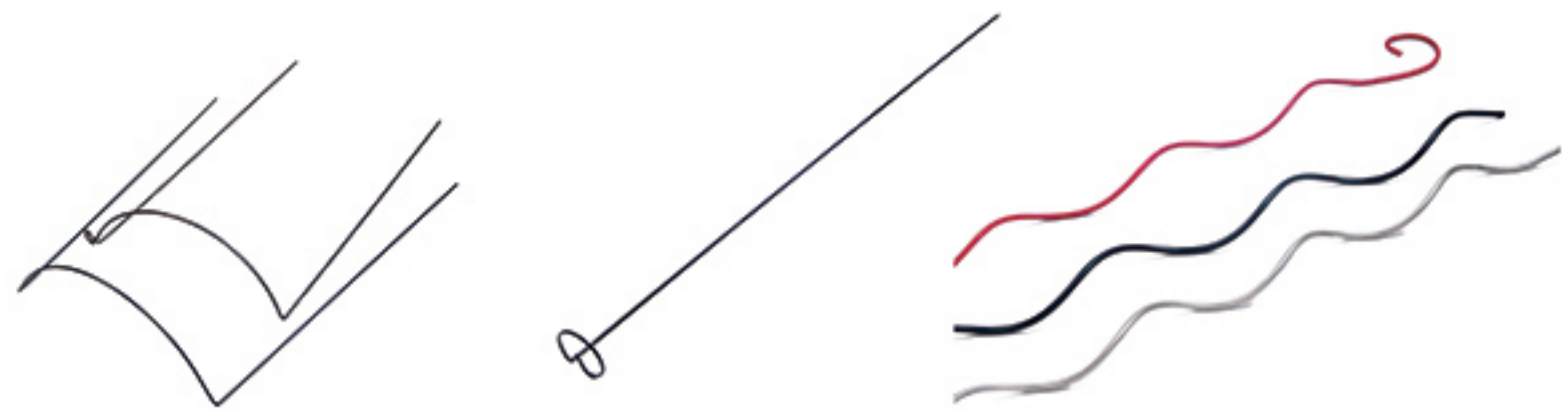

Dia(mm)	Length	Surface Treatment
5	4' 5' 6' 7' ...	Galvanized and Powder Coated
6	4' 5' 6' 7' ...	
7	4' 5' 6' 7' ...	



BIRD SPIKE

PC base with UV
Length: 12"~24"
Width: 50mm
Spike diameter: 1.2~1.5mm
Spike length: 100mm
Spike number: according buyers requirements

ELECTRIC FENCE POST (PIGTAIL STYLE)

Material: Plastic and spring steel

Diameter	6mm-8mm.
Length	600mm-1200mm
Packing	In carton
Custom size available, Any color	

Features:

Lightweight, strong spring steel.
 UV-stabilized plastic for effective insulation.
 Lightweight, strong high-tensile spring steel shaft
 Robot welded foot for easy step-in installation
 Plastic insulation has sealed end for weather resistance



ELECTRIC FENCE POST

Feature:

- 1). Insulation, safety.
 - 2). Keep crows in and wildlife out.
 - 3). Uniquely designed lugs for positive holding and quick release of polywire or polytape.
 - 4). Range of polytape/polywire spacings allow control of most animals.
- Poly fence posts are vertically reinforced for extra stability and feature a combination of different slots for various fence lines. such as poly tape, poly wire and poly rope.
 Poly electric fence post is strong enough by H section poly posts. Selfinsulating polyethylene post with wire holders.
 Galvanized steel spike at end for easy stepin installation into all ground, Rugged and light-weight to can be moved and handled easy.

Length: 3ft, 4ft, 5ft, 6ft
Material: Poly with steel spike.
Packing: 30 or 50pcs/carton



POLE ANCHORS

Finish

Hot dipped galvanized

Electro galvanized


Powder coated in green, brown or other colors

Packing

On pallets


In cartons

Post Hole	Length
51x51mm	600mm
51x102mm	600mm
71x71mm	750mm
91x91mm	750mm
101x101mm	750mm
101x101mm	900mm


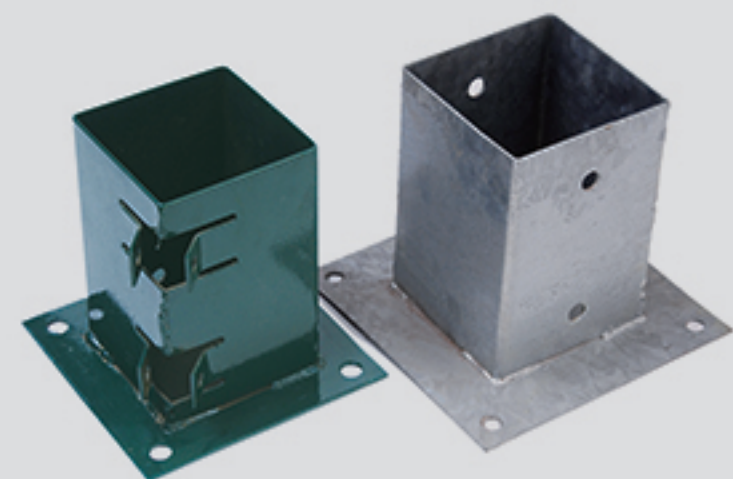


ANCHORS

Material	low carbon
Size	diameter 12~20mm
Length	3'~6'
Surface treatment	galvanized or powder coating
Packing	by pallet

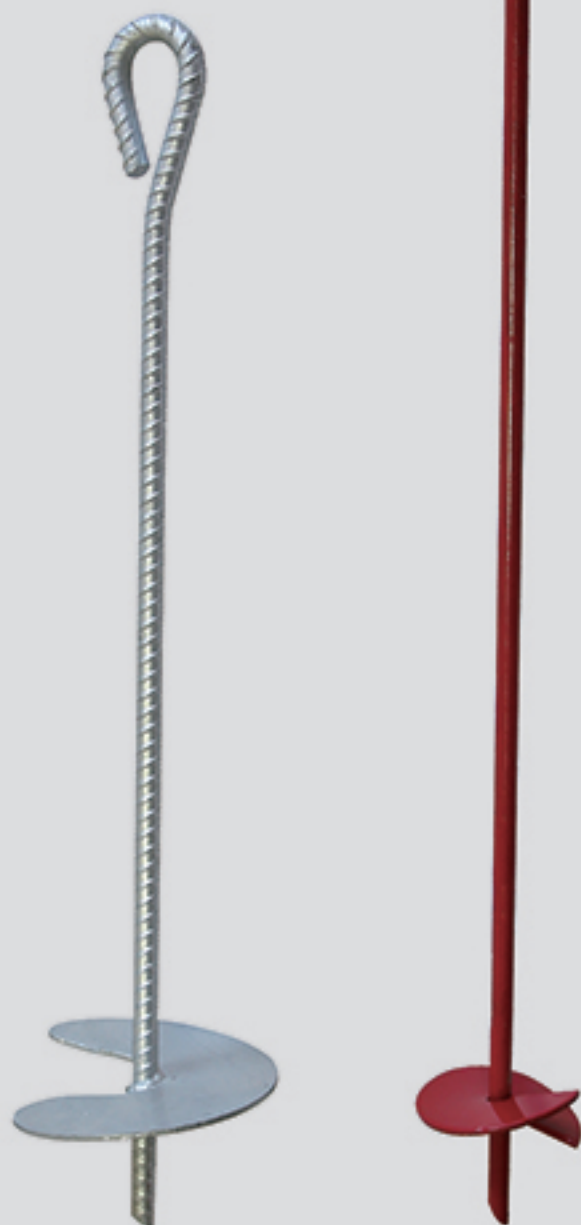

FENCE ACCESSORIES

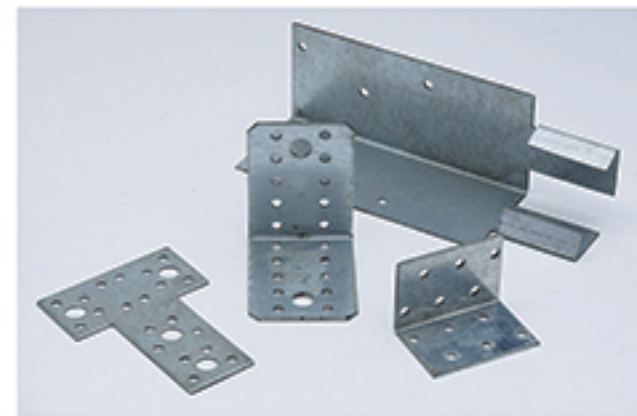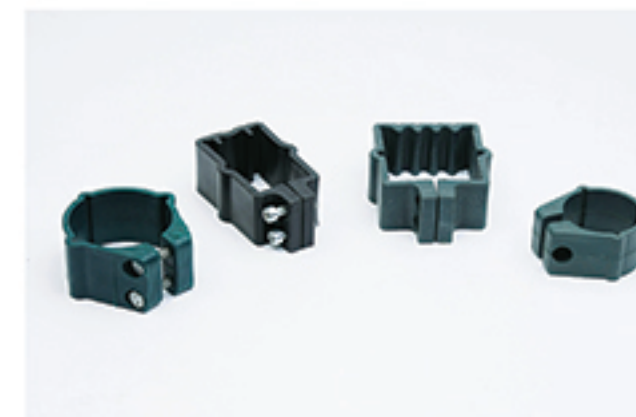

Width	Height	Length
30mm	20mm	95mm
35mm	25mm	100mm
45mm	30mm	120mm



71x71mm
75x75mm
91x91mm
101x101mm



STEEL PIPE

Standard: ASTM A 312/A 312M

Grade: TP304, TP304L, TP316L, TP321, TP316Ti, TP310S etc.

Manufacture Process: Cold draw or Cold roll, Annealed, and Pickled.

Testing: Visual Check for surface, and Micrometer for the W.T and O.D.

Specification: O.D: 1/8 - 24 inch, W.T: SCH5S, SCH10S, SCH40S, SCH80S, SCH160 etc. or Non-regular sizes as requested.




ANGLE STEEL

Material: low carbon

Size: 25 x 25mm; 30 x 30mm; 50 x 50mm.....etc

Length: 6m


Packing: by bundle

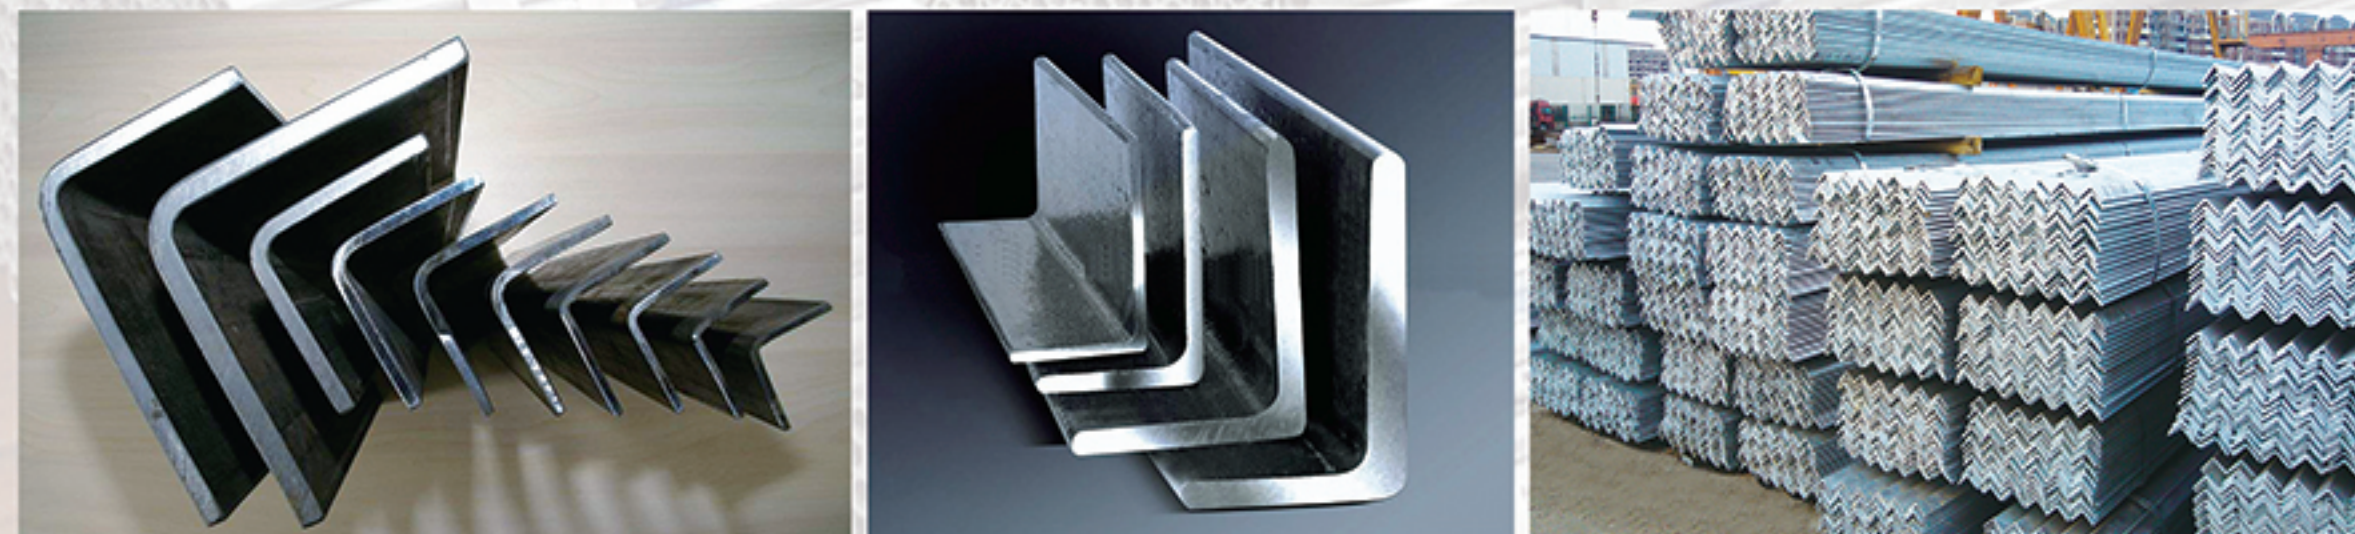

NAILS

Umbrella Roofing Nails Specification : BWG9 x 2" BWG9 x 2-1/2"

Others : Loval round head, flat with counter, diamond point,sunk head, smooth shank, needle point, blue or black finish.

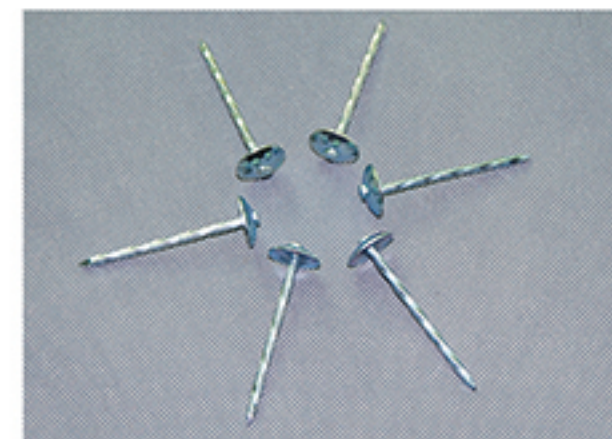

Roofing Nail With Umbrella Head




Roofing Nail With Umbrella Head



Common Nail




Duplex Head Nail

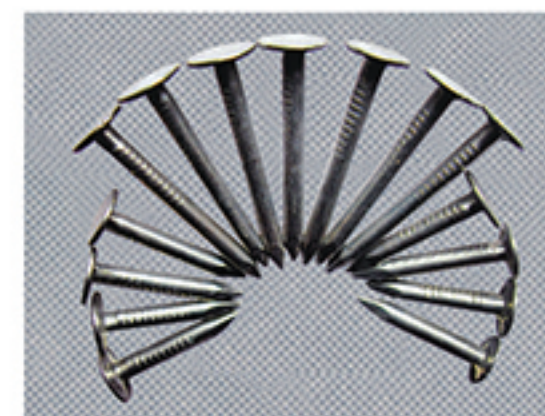

Roofing Nail With Flat Head



U Type Nail

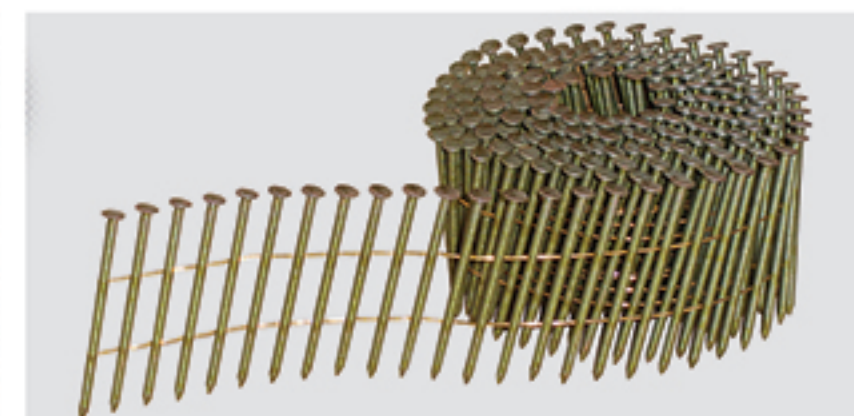

Coil Common Nail



Packing

STAINLESS STEEL WIRE MESH


We are capable of Stainless Steel Wire Mesh and Stainless Steel Wire Mesh Cloth.

Material Type: 302,304,304L,316,316L

Weaving Way: plain weaving, twill weaving and dutch weaving

Features: heat-resisting, acid-resisting, wear-resisting and corrosion-resisting

Application: widely used in petroleum, chemical industrial, environment protection, mine, airspace, paper-making, electronic and metallurgy etc.

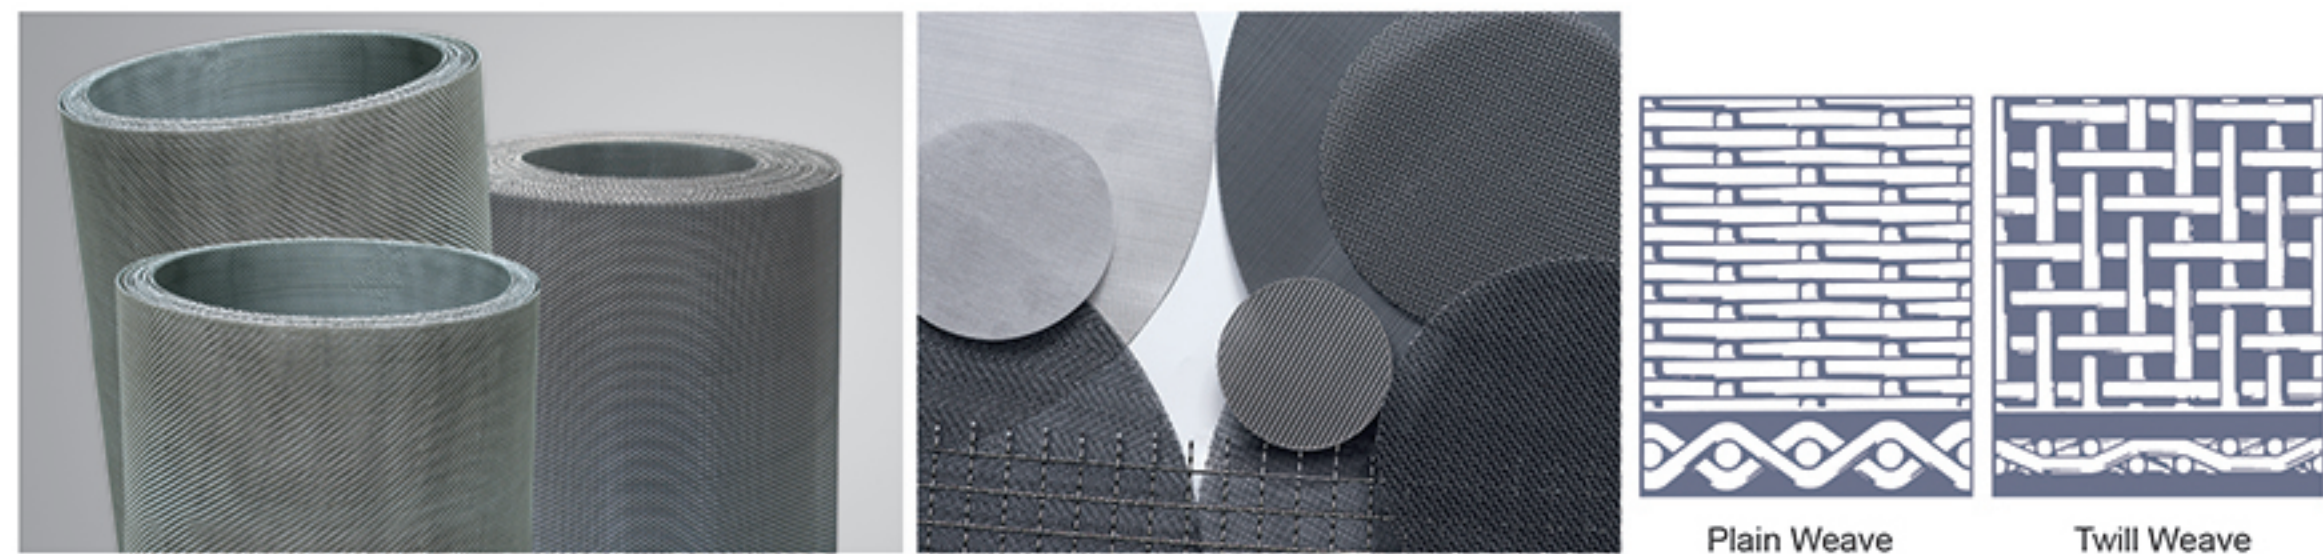


CRIMPED WIRE MESH

Material: S.S./Iron/Steel Wire/Brass Wire


Features: Weaving with pre-crimped wire, offering strong structure

Applications: Crimped wire mesh products are used as fence or filters in a lot of industries; heavy duty crimped wire mesh products are mostly used as screen in mining, coal factory, construction and other industries.

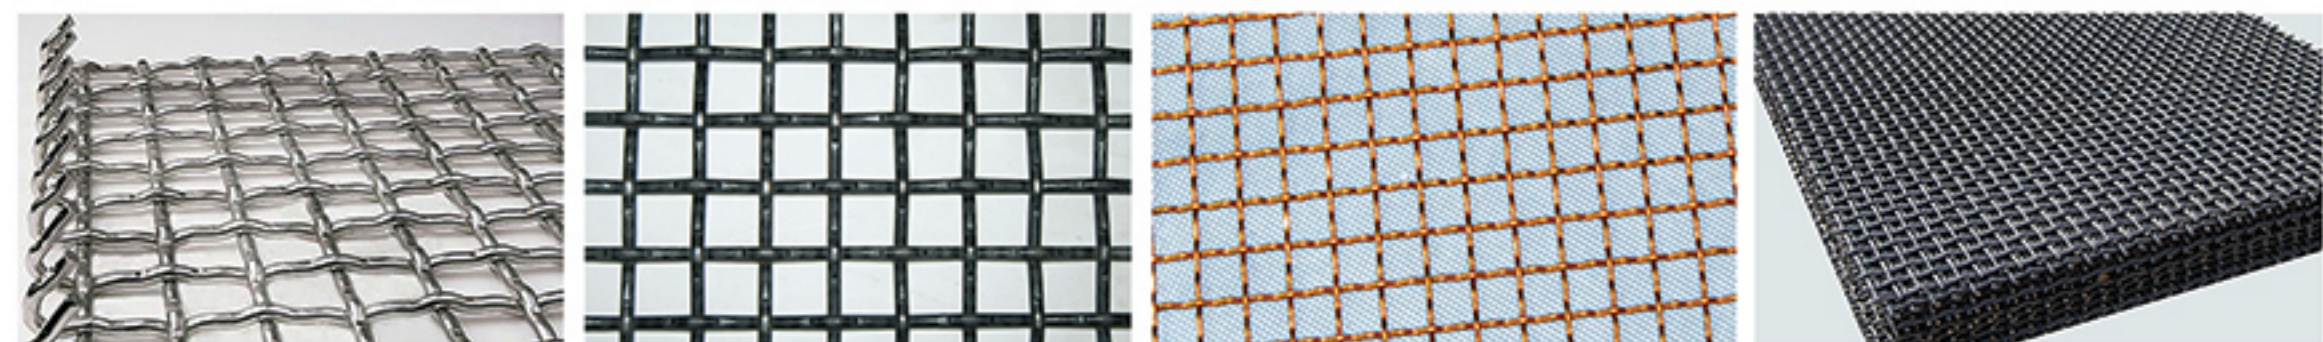


DECORATIVE WIRE MESH

Decorative wire mesh is made with super quality stainless steel, aluminum alloy, brass, copper or other alloy materials. Metal wire mesh fabrics are now catching the eyes of modern designers. It is widely used as curtains, screens for dining hall, isolation in hotels, ceiling decoration, Animal containment and security fencing, etc.

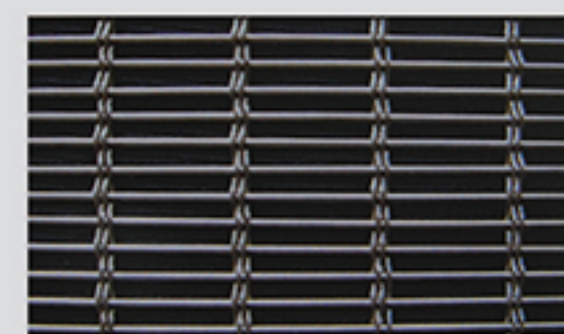


JS-001
 material : stainless steel 304,316,316L
 cable diameter : 1mm x 4
 cable pitch : 36mm
 rod diameter : 2mm
 rod pitch : 4mm
 weight : 7kg/m²

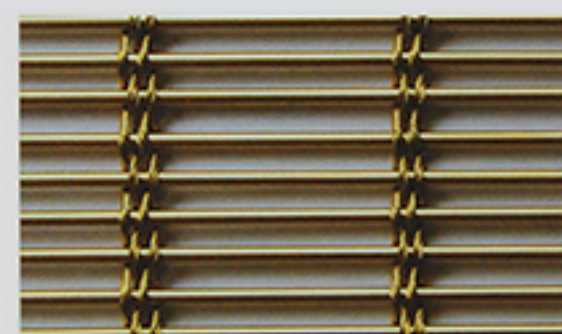

JS-002
 material : stainless steel 304,316,316L
 cable diameter : 1mm x 4
 cable pitch : 36mm
 rod diameter : 2mm
 rod pitch : 4mm
 weight : 7kg/m²



JS-003
 material : stainless steel 304,316,316L
 cable diameter : 2mm x 4
 cable pitch : 50mm
 rod diameter : 3mm
 rod pitch : 6mm
 weight : 11.56kg/m²

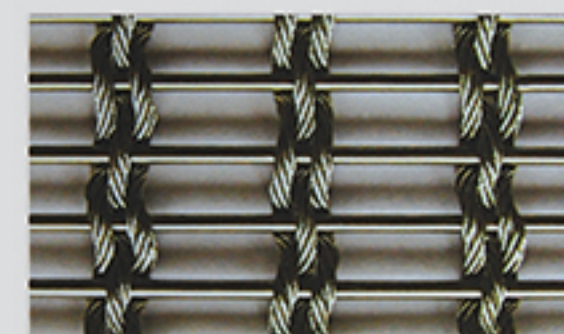



JS-005
 material : stainless steel 304,316,316L
 cable diameter : 3mm x 3
 cable pitch : 40mm
 rod diameter : 3mm
 rod pitch : 11mm
 weight : 9.57kg/m²



JS-006
 spirial dia. : 2.6mm
 spirial pitch : 24.3mm
 cross rod dia. : 2.6mm
 cross rod pitch : 22.5mm
 weight : 6.8kg/m²



JS-007
 material : stainless steel 304,316,316L
 cable diameter : 2mm x 1
 cable pitch : 3.1mm
 rod diameter : 1.2mm
 rod pitch : 5mm
 weight : 10kg/m²

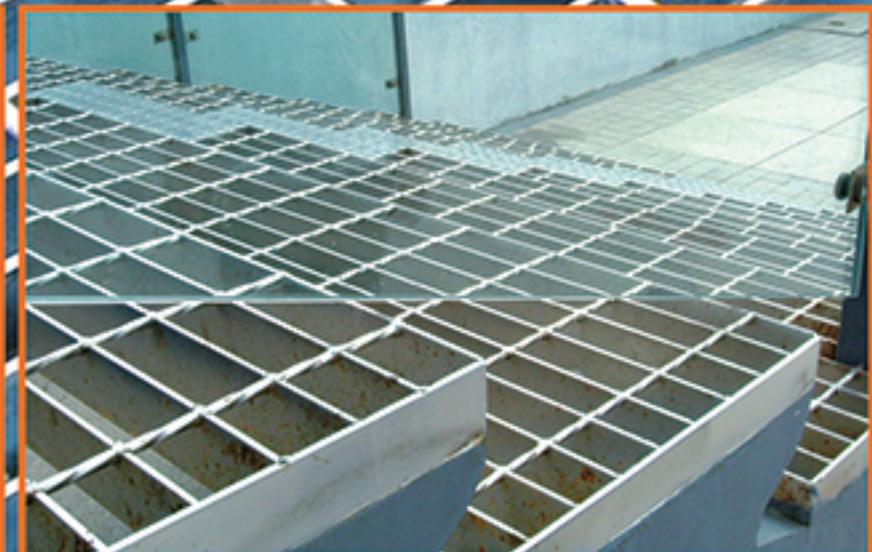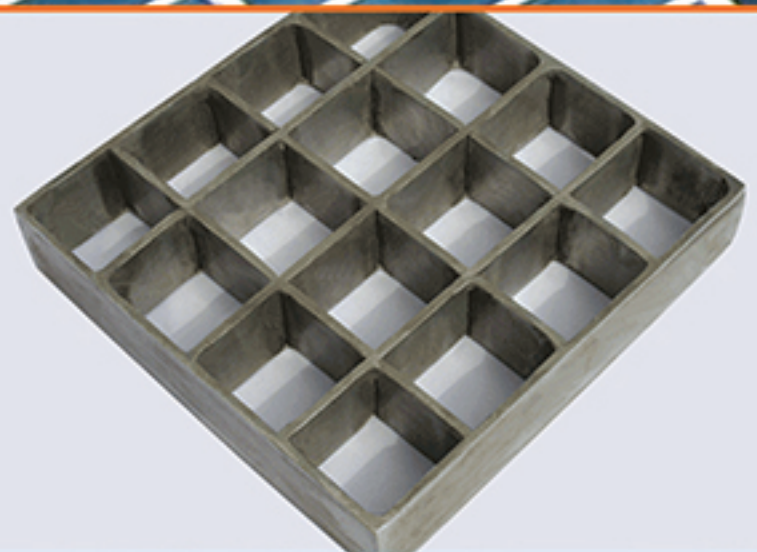

STEEL GRATING


Usual specification: G/303/30/100/F G

Using: Steel grating applied to make platform, floor, walkway, stair treads, trestle, fending, drainage, trench cover, pit cover, suspended ceiling, ventilates and light through facility, etc.

ANGLE BEAD

Strong and resilient bead designed for 2 and 3 coat applications. For a true, strong and straight external corner.

Material	Edge	Length	Weight (Kg/m)	Pcs/Ctn	Ctns/Pallet
Gal.steel	45mm	2.7m	0.123	40	25
Gal.steel	45mm	2.7m	0.128	40	25
Gal.steel	30.5mm	2.7m	0.143	40	25
Gal.steel	56mm	2.7m	0.24	40	25

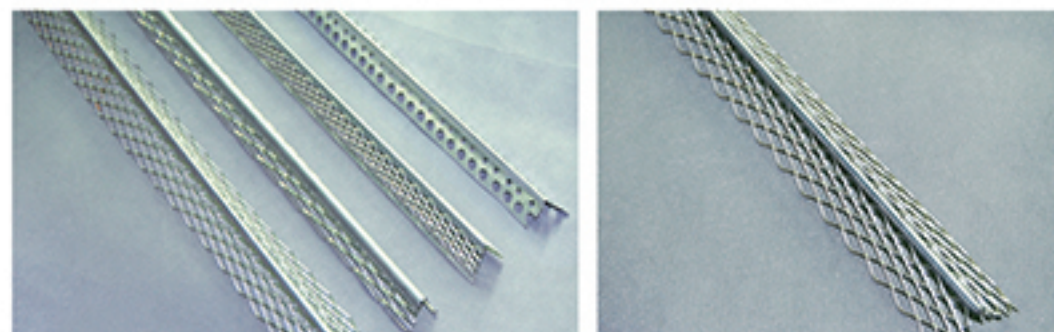

PERFORATED METAL SHEET



Hole Patterns including: Round, Rectangular hole, Square, Triangle, Diamond, Hexagonal, Cross, Slotted and other patterns according to your drawings or application requirement.

Custom designs available. Precise parameters guaranteed.

Please indicate parameters below when you ask for a quotation:

- Hole Pattern
- Sheet Shape
- Material
- Sheet Sizes
- Unique Requirements
- Applications


Other information you regard helpful.

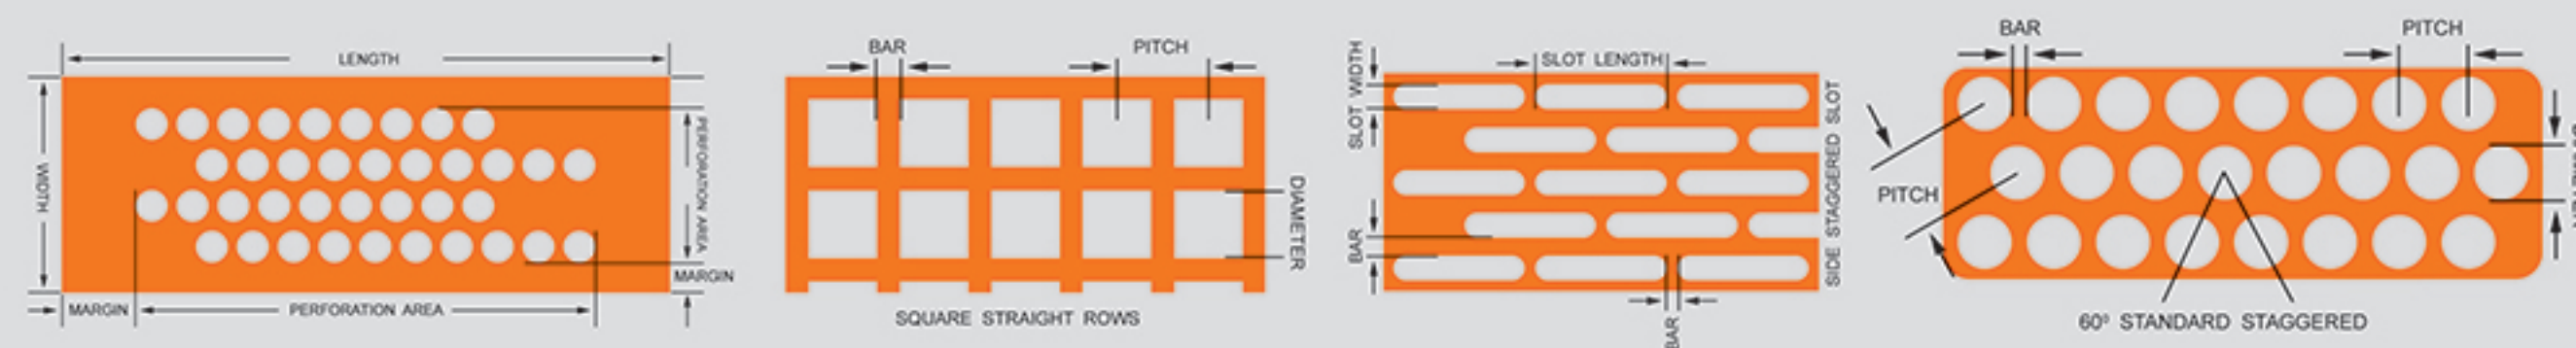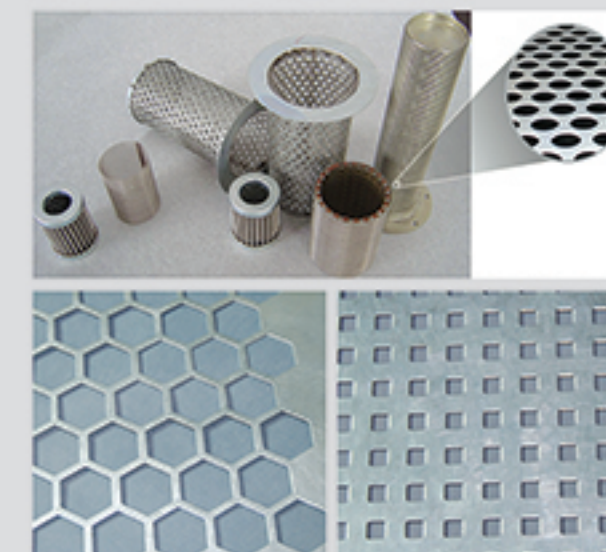

EXPANDED METAL MESH

Type: low carbon steel sheet, aluminum sheet, stainless steel sheet stretching pressing and welding





Uses: fencing for road, railway, civil building, water conservancy's construction; protecting of all kinds of machines, electrical equipment, window and aquatic product's breeding.

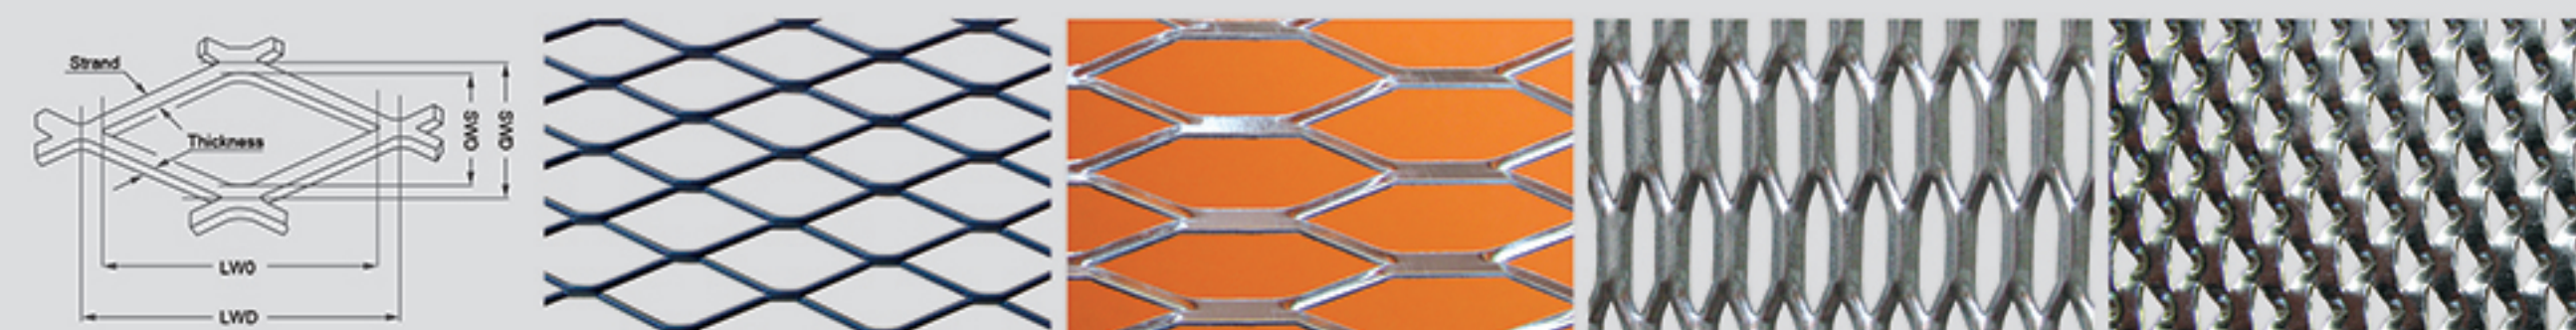

FIBERGLASS MESH

Application: It is widely used in wall reinforce, out-side wall heat insulation, roof waterproof, reinforcement, plastic, bitumen, plaster, marble, mosaic.etc.

Item	Specifications	Width	Length	Colour	Packing
Fiberglass Mesh	Mesh:4x4mm, 5x5mm 60~~240g/m ²	1~~2m	50m/coil	White,blue, orange,etc	Shrink film then carton or woven plastic bag.
Self-adhesive Mesh Tape	60~~240g/m ²	50mm	90m/coil	White,blue, orange,etc	
Corner Bead	25X25mm	Corner:25X25mm Mesh:100x100mm	2m/pcs	White	150pcs/carton
Insulation Nails	8x80/100/120/140 , 10x80/100/120/140			White , bule	In carton

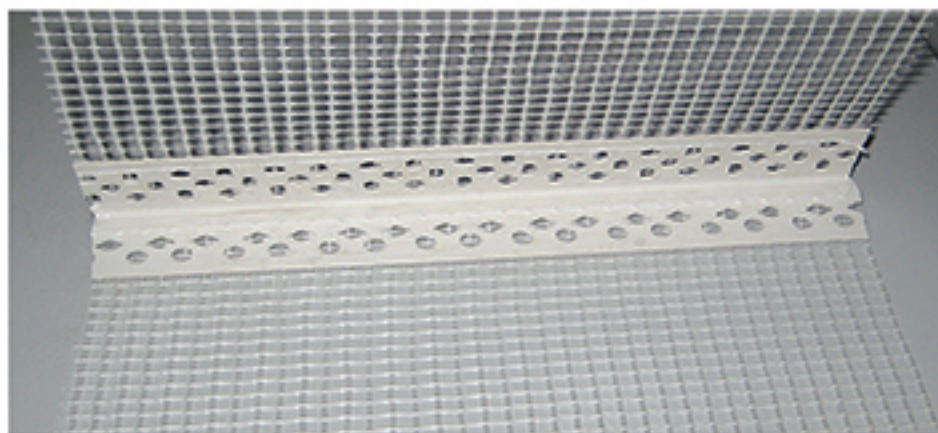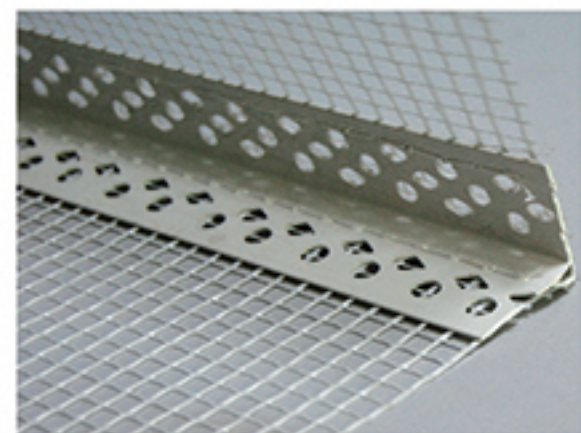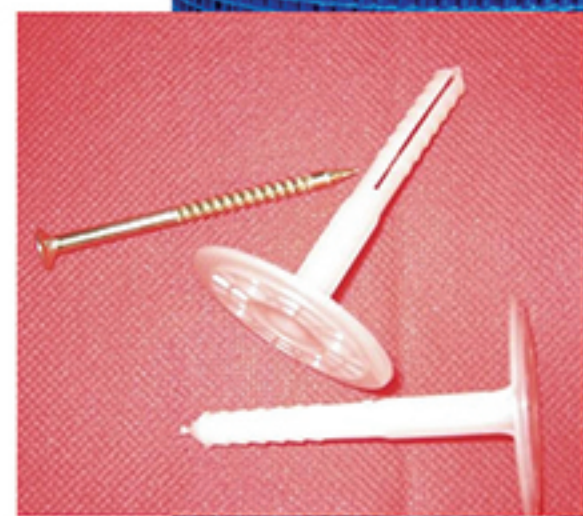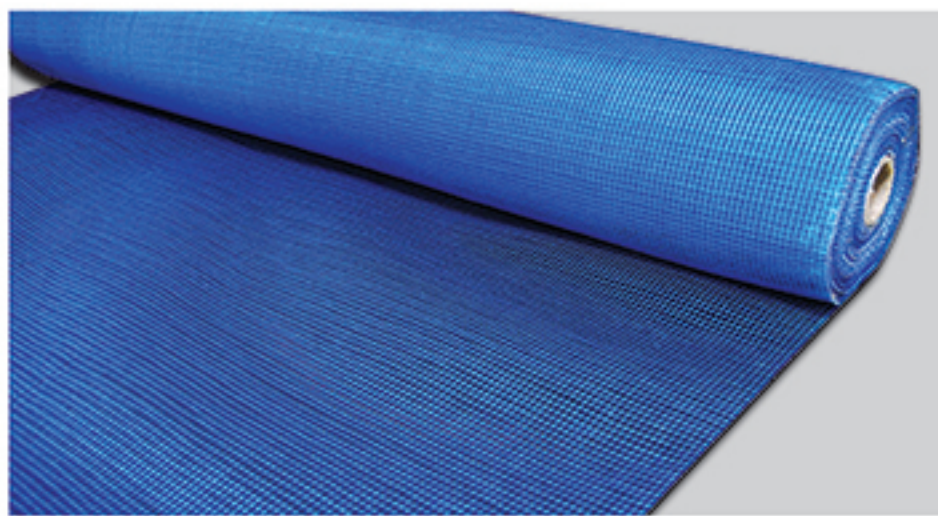

SHADE NET

Application: against sunshine in green house, film tunnels, sports centers, pools and construction area. Also as a grains collection in horticulture and forestry. Keep the inside warm in winter.


Item	Weight	Shade Rate	Width	Length	Colour	Packing
Shade net	55g/m ² ~500g/m ²	30%~80%	Round wire: 1~4m	Can be customized as per your requirements	Green, dark green, black, yellow, gray, blue, etc	Shrink film bag.
			Flat wire: 1~10m			



SAFETY NETTING

Mostly used in security and protection of constructs and prevents the high level brick and stone falling.

One of the most famous uses of safety netting is as a barrier for safe viewing at sporting events. You'll also want to consider other aspects before purchasing safety netting. It is reusable so you can move it from one location to another. It will stay flexible even in cold weather.

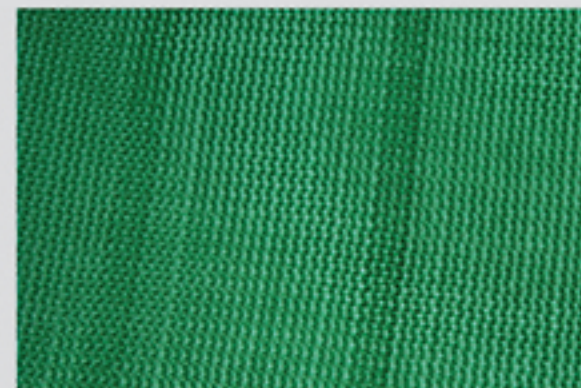



WINDOW SCREENING

Fiberglass Insect Screen is made of glass fiber monofilament, and coat vinyl resin by special technics , in this way, good performance of the two kinds of material can be combined, and then processed by carding, weaving and heat setting, it has the features of easily washing, high tensile strength, anti-deformation, good light transmission and durability.

Specifications:

Mesh: 18x14, 18x16, 18x18

Diameter of yarn: normally 0.011", 0.012"

Width: 60cm-150cm

Color: black, gray, gray and white, green. (note: the price is also related to the color)


Galvanized Iron Wire Netting:

Specifications: 14meshx14 mesh, 16meshx14mesh, 16meshx16mesh, 18meshx16mesh, 18meshx18mesh, 18mesh x 14mesh

Wire Diameter: BWG34 to BWG 32.


Surface Treatment: hot-dipped or electro-galvanized after weaving. White or light-blue.

Application: widely used in hotels and buildings to prevent insects and bugs from entering.

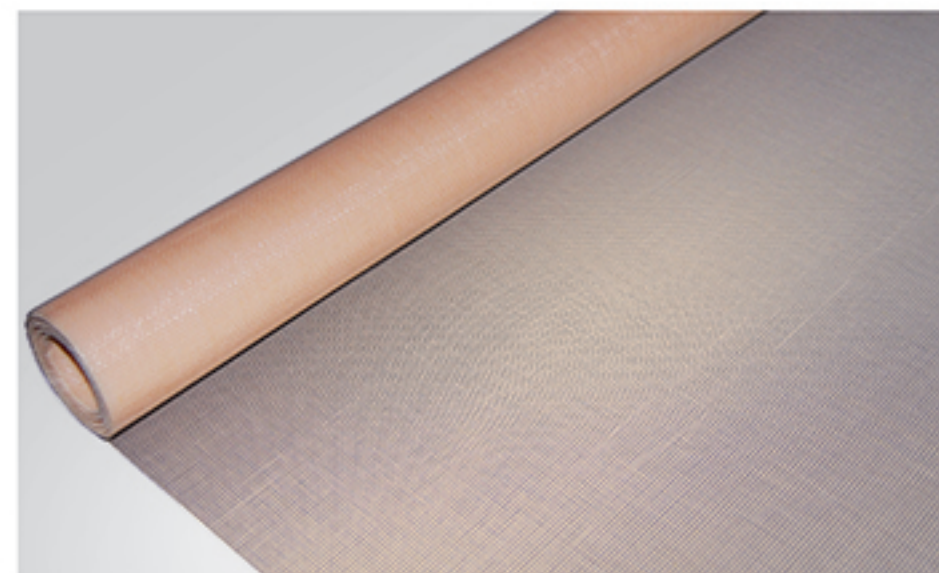

MACHINERY


If you are interested, please send the specifications to us for reference.

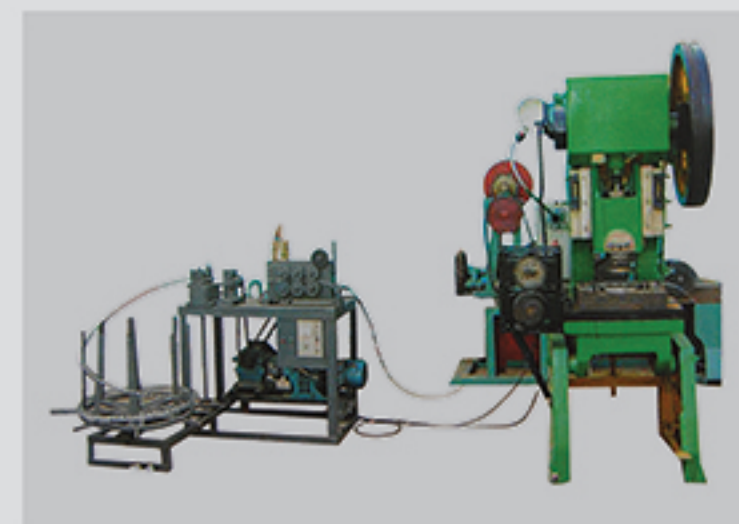

Razor Barbed Wire Machine



Heavy Welded Mesh Panel Welding Machine

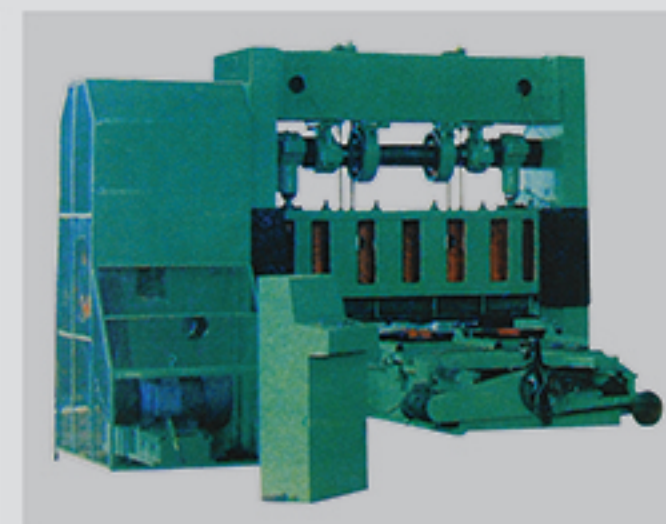


Expanded Metal Mesh Machine



Animal Feed Machine



Barbed Wire Machine

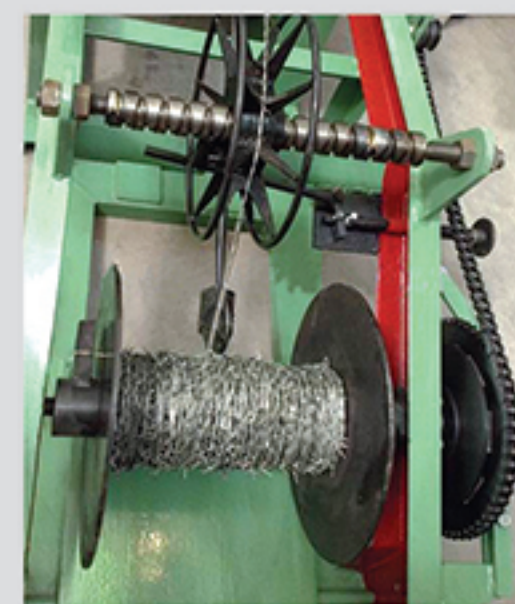

Chain Link Fence Machine



Fiberglass Mesh Machine